


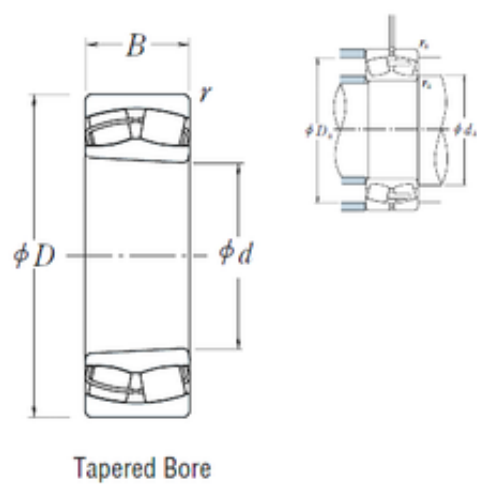

Bearing No. 23124CKE4

e	0.29
r	2
d	120 mm
D	200 mm
B	62 mm
C	62 mm
Y3	2.4
ra	2
X0	1
Z_	21
C0	720
Y2	3.5
Y0	2.3
B_	62
X2	0.67
D_	200
Y1	2.3
X1	1
DE_	180.721
DI_	141.434
SIR	24
DA_	20
Noun	Bearing
bomp	23124CKE4
ALP2	50
ALP1	10
mass	7.85
ALP3	0
yobi	23124CKE4
SDM_	161.077

KBRG	2322
SBRG	31
Bore	4.724 Inch 120 Millimeter
Width	2.441 Inch 62 Millimeter
LangID	1
UNSPSC	31171510
da min	130
Da min	175 mm
da max	138 mm
Weight	7,85 Kg
r min.	2 mm
ALPHA_	0.189
D_a min	175
hidYobi	23124CKE4
Oil rpm	1800
GRS rpm	1400
TSR rpm	2800
D_a max	190
ra max.	2 mm
Da max.	190 mm
da min.	130 mm
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	120x200x62
Inventory	0.0
Enclosure	Open
Macha rpm	0
Prod_Type3	SRB_CTB_TB
bore type:	Tapered 1:12
Width (mm)	62
Weight / LBS	7.64

Bore Profile	Tapered
Product Group	B04311
Cage Material	Steel
Inch - Metric	Metric
Bearing number	23124CKE4
Relubricatable	Yes
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
bore diameter:	120 mm
Keyword String	Spherical
cage material:	Bronze
overall width:	62 mm
Rolling Element	Spherical Roller Bearing
Mounting Method	Adapter Mount
Manufacturer URL	http://www.nskamericas.com
outer ring type:	Not Split
Long Description	120MM Tapered Bore; 200MM Outside Diameter; 62MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part N
Outside Diameter	7.874 Inch 200 Millimeter
Manufacturer Name	NSK
outside diameter:	200 mm
Weight / Kilogram	7.7
Withdrawal Sleeve	AHX3124 (Specify bore)
Bore Diameter (mm)	120

Internal Clearance	C0-Medium
Adapter Part Number	SNW3124 H3124 HA3124 HE3124 (Specify bore) Inch H3124 (Specify bore) Millimeter
internal clearance:	C0
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,29
lubrication hole type:	Oil Grooves And Holes In Outer Ring
Calculation factor (Y0)	2,3
Calculation factor (Y2)	3,5
(Oil) Lubrication Speed	1800 r/min
Manufacturer Item Number	23124CKE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1400 r/min
Basic dynamic load rating (C)	465 kN
Basic static load rating (C0)	720 kN