


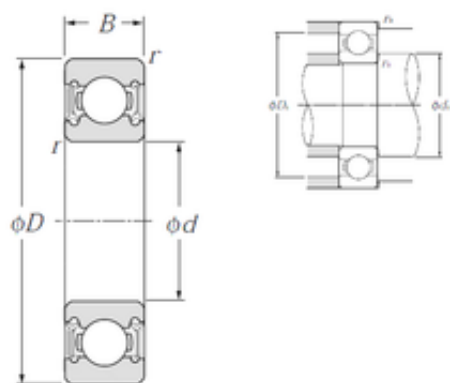

Bearing No. 6021LLU

C	26 mm
d	105 mm
D	160 mm
B	26 mm
Bore	4.134 Inch 105 Millimeter
Noun	Bearing
Weight	1,59 Kg
da max	119 mm
UNSPSC	31171504
r min.	2 mm
da min.	114 mm
ra max.	2 mm
series:	60
Da max.	151 mm
Category	Single Row Ball Bearing
Enclosure	2 Seals
Size (mm)	105x160x26
Inventory	0.0
Snap Ring	No
Width (mm)	26
bore type:	Round
maximum rpm:	4700 RPM
Weight / LBS	3.51
Cage Material	Steel
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
bore diameter:	105 mm
Keyword String	Ball

overall width:	26 mm
cage material:	Steel
fillet radius:	2 mm
Bearing number	6021LLU
Enclosure Type	Contact Seal
Reference speed	2 400 r/min
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	6.299 Inch 160 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	105MM Bore; 160MM Outside Diameter; 26MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	1.024 Inch 26 Millimeter
outside diameter:	160 mm
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	1.592
inner ring width:	26 mm
outer ring width:	26 mm
Manufacturer Name	NTN
Bore Diameter (mm)	105
Internal Clearance	C0-Medium
internal clearance:	CN
snap ring included:	Without Snap Ring
Outer Diameter (mm)	160

Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2400 rpm
static load capacity:	65500 N
dynamic load capacity:	72500 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6021LLU/2A
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	72,5 kN
Maximum Capacity / Filling Slot	No