


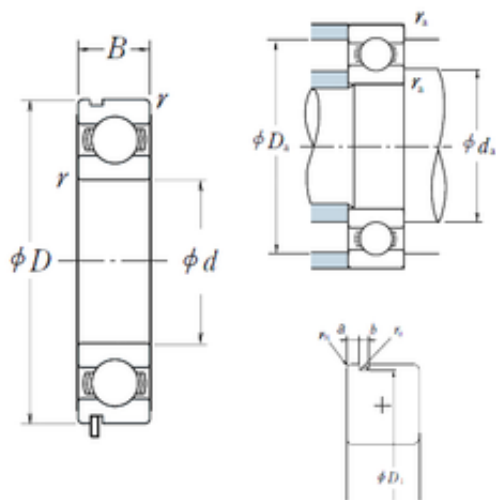

Bearing No. 6021N

a	3,71 mm
r	2
d	105 mm
D	160 mm
B	26 mm
C	26 mm
b	3,1 mm
fo	15.8
B_	26
ra	2
C0	66
D1	155,22 mm
D_	160
Z_	15
rn	0,5 mm
ro	0.6
DE_	151.169
SRI	8.63
D_a	151
DA_	16.669
SRE	8.63
DI_	117.831
yobi	6021N
mass	1.58
SBRG	10
bomp	0
KBRG	6101
SREX	0.03
SREN	-0.03
SRIN	-0.03

SDM_	134.5
SRIX	0.03
ALPHA_	0
r min.	2 mm
C_conv	72500
da max	120 mm
da min	114
Weight	1,58 Kg
LangID	1
ra max.	2 mm
Da max.	151 mm
Oil rpm	4800
da min.	114 mm
r0 max.	0,6 mm
hidYobi	6021N
GRS rpm	4000
hidTable	ecat_NSRDGB
Size (mm)	105x160x26
Prod_Type3	DGBB_SR_N_OT
Width (mm)	26
Bearing number	6021N
Bore Diameter (mm)	105
Outer Diameter (mm)	160
(Oil) Lubrication Speed	4 800 r/min
(Grease) Lubrication Speed	4 000 r/min
Basic dynamic load rating (C)	72,5 kN
Basic static load rating (C0)	66 kN