


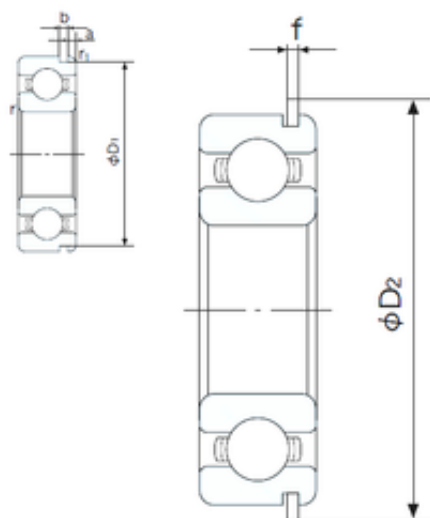

Bearing No. 6021NR

f	2.82 mm
a	3.71 mm
b	3.1 mm
d	105 mm
D	160 mm
B	26 mm
C	26 mm
D2	169.7 mm
D1	155.22 mm
r1	0.5 mm
Width	26 mm
r min.	2 mm
Weight	1.54 Kg
r1 min.	0.5 mm
b (min)	3.1 mm
a (max)	3.7 mm
Da (max)	152 mm
Dx (min)	172 mm
ra (max)	2 mm
da (min)	113 mm
D1 (max)	155.2 mm
Cy (max)	6.1 mm
Factor fo	15.8
Enclosure	Snap Ring Groove with Snap Ring
Bore Size	105 mm
Size (mm)	105x160x26
Bore Type	Cylindrical Bore
Width (mm)	26
Configuration	Single Row

Bearing number	6021NR
Snap Ring Width	2.8 mm
Radial Clearance	0.015 to 0.041 mm
Outside Diameter	160 mm
Static Load Rating	65,500 N
Bore Diameter (mm)	105
Outer Diameter (mm)	160
Dynamic Load Rating	72,500 N
Limiting Speed - Oil	4,800 rpm
Fillet Radius/Chamfer	2 mm
Limiting Speed - Grease	4,000 rpm
(Grease) Lubrication Speed	4000 r/min
Snap Ring Outside Diameter	169.7 mm
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	72,5 kN