


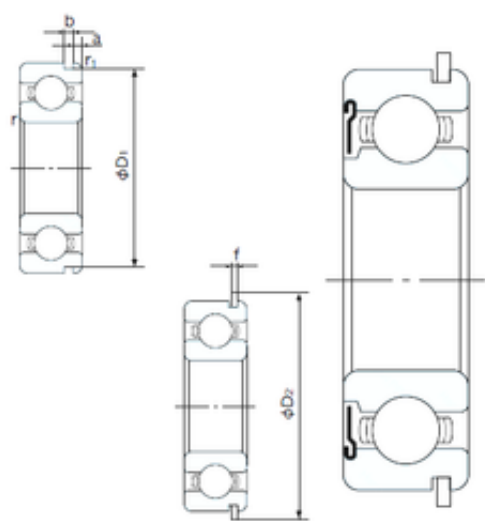

Bearing No. 6021ZNR

a	3.71 mm
f	2.82 mm
b	3.1 mm
d	105 mm
D	160 mm
B	26 mm
C	26 mm
r1	0.5 mm
D2	169.7 mm
D1	155.22 mm
Width	26 mm
Weight	1.54 Kg
r min.	2 mm
b (min)	3.1 mm
r1 min.	0.5 mm
a (max)	3.7 mm
Cy (max)	6.1 mm
D1 (max)	155.2 mm
ra (max)	2 mm
Da (max)	152 mm
da (min)	113 mm
Dx (min)	172 mm
Factor fo	15.8
Bore Size	105 mm
Size (mm)	105x160x26
Bore Type	Cylindrical Bore
Enclosure	Single Shield with Snap Ring
Width (mm)	26
Configuration	Single Row

Bearing number	6021ZNR
Snap Ring Width	2.8 mm
Outside Diameter	160 mm
Radial Clearance	0.015 to 0.041 mm
Static Load Rating	65,500 N
Bore Diameter (mm)	105
Dynamic Load Rating	72,500 N
Outer Diameter (mm)	160
Limiting Speed - Oil	4,800 rpm
Fillet Radius/Chamfer	2 mm
Limiting Speed - Grease	4,000 rpm
Snap Ring Outside Diameter	169.7 mm
(Grease) Lubrication Speed	4000 r/min
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	72,5 kN