


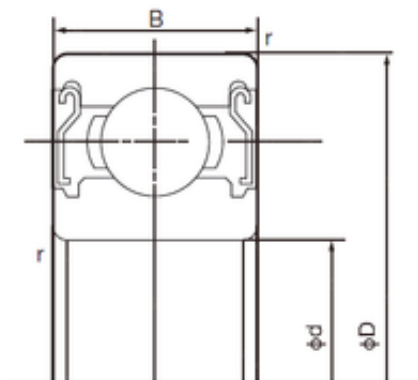

Bearing No. 6021ZZ

D	160 mm
d	105 mm
B	26 mm
C	26 mm
Noun	Bearing
Bore	4.134 Inch 105 Millimeter
Width	26 mm
UNSPSC	31171504
r min.	2 mm
Weight	1.60 Kg
da min.	113 mm
Da max.	152 mm
ra max.	2.0 mm
Category	Single Row Ball Bearing
ra (max)	2 mm
Da (max)	152 mm
da (min)	113 mm
Factor fo	15.8
Inventory	0.0
Bore Size	105 mm
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	105x160x26
Width (mm)	26
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric

Other Features	Deep Groove
Keyword String	Ball
Bearing number	6021ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	105MM Bore; 160MM Outside Diameter; 26MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.024 Inch 26 Millimeter
Outside Diameter	6.299 Inch 160 Millimeter
Radial Clearance	0.015 to 0.041 mm
Weight / Kilogram	0
Manufacturer Name	NACHI
Bore Diameter (mm)	105
Internal Clearance	C0-Medium
Static Load Rating	65,500 N
Dynamic Load Rating	72,500 N
Outer Diameter (mm)	160
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	2 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,000 rpm
Internal Special Features	No

Basic dynamic load rating (C)	72,5 kN
Basic static load rating (C0)	65,5 kN
Maximum Capacity / Filling Slot	No