




Bearing No. NKIS20

s	0,5 mm / Axial displacement
D	42 mm
m	129 g / Weight
F	28 mm
B	20 mm
d	20 mm
Noun	Bearing
Bore	0.787 Inch 20 Millimeter
Width	0.787 Inch 20 Millimeter
UNSPSC	31171512
Retainer	Yes
Category	Needle Non Thrust Roller Bearing
Enclosure	Open
Component	Complete with Outer and Inner Ring
Separable	Inner Ring - Both Sides
Inventory	85.0
Size (mm)	20x42x20
Width (mm)	20
Closed End	No
Weight / LBS	0.284
n_B	8300 1/min / Reference speed
Inch - Metric	Metric
Product Group	B04144
n_G	15100 1/min / Limiting speed
C_r	32500 N / Dynamic load rating (radial)

Self Aligning	No
Other Features	Plain Inner Ring 2 Rib Outer Ring Radial Precision Bearing Steel Cage Heavy Duty Ground Raceway with Rib Oil Hole
Bearing number	NKIS20
Keyword String	Needle
Thrust Bearing	No
C _{ur}	6400 N / Fatigue limit load, radial
C _{0r}	36500 N / Static load rating (radial)
Relubricatable	Yes
Rolling Element	Needle Roller Bearing
r _{min}	0,6 mm
Manufacturer URL	http://www.ina.com
Long Description	20MM Bore; 42MM Outside Diameter; 20MM Width; Needle Roller Bearing; Complete with Outer and Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; Inner Ring - Both Sides Sepa
Outside Diameter	1.654 Inch 42 Millimeter
Weight / Kilogram	0.13
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	20
Outer Diameter (mm)	42
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00

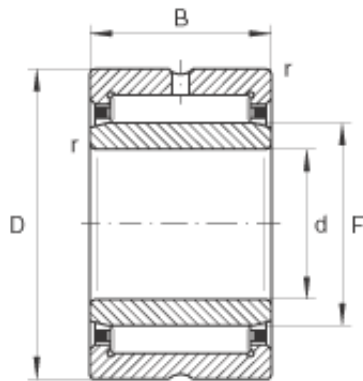

Manufacturer Item Number	NKIS20
Number of Rows of Rollers	Single Row