


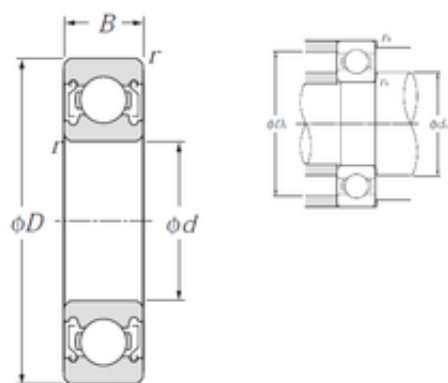

Bearing No. 6021ZZ

D	160 mm
d	105 mm
B	26 mm
C	26 mm
rn	0,5 mm
Bore	4.134 Inch 105 Millimeter
Noun	Bearing
da max	119 mm
UNSPSC	31171504
Weight	1,59 Kg
r min.	2 mm
ra max.	2 mm
da min.	114 mm
Da max.	151 mm
Category	Single Row Ball Bearing
Size (mm)	105x160x26
Snap Ring	No
Inventory	0.0
Enclosure	2 Metal Shields
Width (mm)	26
bore type:	Round
Weight / LBS	3.50535
Inch - Metric	Metric
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
bore diameter:	105 mm
Keyword String	Ball
overall width:	26 mm

cage material:	Steel
fillet radius:	2 mm
Other Features	Deep Groove Shell Alvania Prelubricated
Bearing number	6021ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	105MM Bore; 160MM Outside Diameter; 26MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	6.299 Inch 160 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.024 Inch 26 Millimeter
precision rating:	ISO Class 0
outer ring width:	26 mm
inner ring width:	26 mm
Weight / Kilogram	1.6
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	160 mm
Bore Diameter (mm)	105
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring

Outer Diameter (mm)	160
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	65500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	4000 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	72500 N
Internal Special Features	No
(Grease) Lubrication Speed	4 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	72,5 kN
Maximum Capacity / Filling Slot	No