




Bearing No. H936340/H936310

|                                 |                      |
|---------------------------------|----------------------|
| R                               | 6,3 mm               |
| a                               | 16,8 mm              |
| d                               | 155,575 mm           |
| D                               | 330,2 mm             |
| T                               | 85,725 mm            |
| B                               | 79,375 mm            |
| C                               | 53,975 mm            |
| r                               | 6,3 mm               |
| Ab                              | 8,4 mm               |
| Aa                              | 18,4 mm              |
| Db                              | 282 mm               |
| da                              | 192,5 mm             |
| db                              | 209 mm               |
| Da                              | 311,5 mm             |
| Weight                          | 31,61 Kg             |
| Size (mm)                       | 155.575x330.2x85.725 |
| Width (mm)                      | 85,725               |
| Factor (K)                      | 0,72                 |
| Factor (G1)                     | 637,7                |
| Factor (Cg)                     | 0,0433               |
| Factor (G2)                     | 69,1                 |
| Bearing number                  | H936340/H936310      |
| Bore Diameter (mm)              | 155,575              |
| Outer Diameter (mm)             | 330,2                |
| Calculation factor (e)          | 0,81                 |
| Basic static load rating (C0)   | 1400 kN              |
| Basic dynamic load rating (C1)  | 960 kN               |
| Basic dynamic load rating (C90) | 249                  |

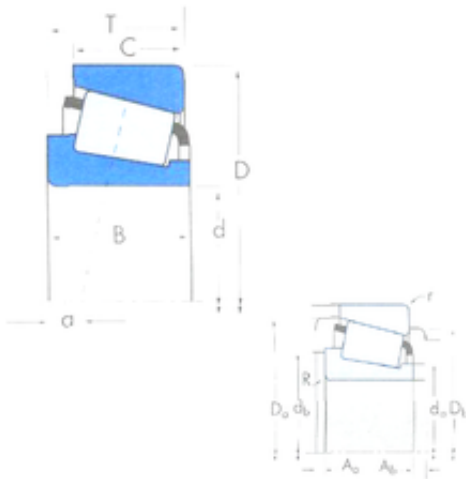

|                                  |     |
|----------------------------------|-----|
| Basic dynamic load rating (Ca90) | 345 |
|----------------------------------|-----|