


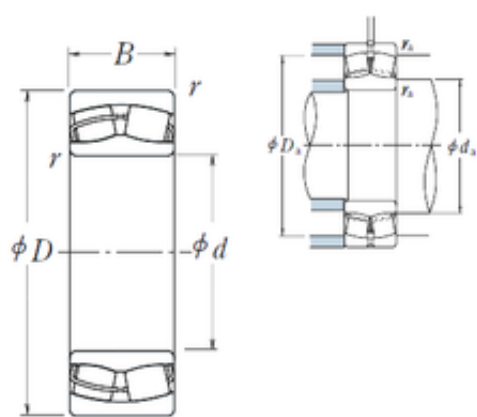

Bearing No. 23128CE4

e	0.28
r	2.1
d	140 mm
D	225 mm
B	68 mm
C	68 mm
Y3	2.4
ra	2
X0	1
Z_	23
C0	945
Y2	3.6
Y0	2.3
B_	68
X2	0.67
D_	225
Y1	2.4
X1	1
DE_	204.406
DI_	162.149
SIR	26
DA_	21.5
Noun	Bearing
bomp	23128CE4
ALP2	40
ALP1	10
mass	10.5
ALP3	0
yobi	23128CE4
SDM_	183.277

KBRG	2322
SBRG	31
Bore	5.512 Inch 140 Millimeter
Width	2.677 Inch 68 Millimeter
UNSPSC	31171510
Weight	10,5 Kg
da min	152
Da min	198 mm
da max	158 mm
ALPHA_	0.186
r min.	2,1 mm
LangID	1
D_a min	198
da min.	152 mm
D_a max	213
hidYobi	23128CE4
TSR rpm	2400
Da max.	213 mm
ra max.	2 mm
Oil rpm	1600
GRS rpm	1200
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Macha rpm	0
Inventory	0.0
Size (mm)	140x225x68
Enclosure	Open
Prod_Type3	SRB_CTB_CB
bore type:	Straight
Width (mm)	68
Weight / LBS	10.54

Bore Profile	Straight
Product Group	B04311
Cage Material	Steel
Inch - Metric	Metric
Bearing number	23128CE4
overall width:	68 mm
Keyword String	Spherical
bore diameter:	140 mm
cage material:	Bronze
Relubricatable	Yes
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Outside Diameter	8.858 Inch 225 Millimeter
outer ring type:	Not Split
Long Description	140MM Straight Bore; 225MM Outside Diameter; 68MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
outside diameter:	225 mm
Weight / Kilogram	10.54
Withdrawal Sleeve	Not Applicable
Bore Diameter (mm)	140
Internal Clearance	C0-Medium
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
internal clearance:	C0

Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Calculation factor (e)	0,28
Harmonized Tariff Code	84823080
lubrication hole type:	Oil Grooves And Holes In Outer Ring
(Oil) Lubrication Speed	1600 r/min
Calculation factor (Y0)	2,3
Calculation factor (Y2)	3,6
Manufacturer Item Number	23128CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1200 r/min
Basic dynamic load rating (C)	580 kN
Basic static load rating (C0)	945 kN