


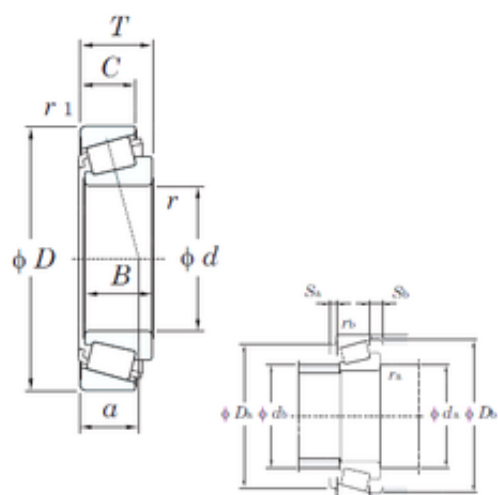

Bearing No. 32013JR

D	100 mm
d	65 mm
T	23 mm
B	23 mm
C	17,5 mm
a	22,5 mm
e	0.46
Cr	113
Y0	0.72
Y1	1.31
Cu	20.6
C0r	137
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
a(mm)	22.5
Da min	90 mm
da max	72 mm
Weight	0,664 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	97
db(max)	72
Da(max)	91.5
Da(min)	90
r1(min)	1.5
Sa(min)	4
Sb(min)	5.5
ra(max)	1.5

rb(max)	1.5
da(min)	73.5
ra max.	1,5 mm
Db min.	97 mm
Da max.	91,5 mm
da min.	73,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	4800
Category	Tapered Roller Bearings Assembly
Size (mm)	65x100x23
Component	Assembly
Inventory	0.0
Width (mm)	23
Grease lub.	3600
Bearing No.	32013JR
Basic Number	32013
Weight / LBS	1.464
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.906 Inch 23 Millimeter
Bearing number	32013JR
Precision Class	Standard
(Refer.)Mass(kg)	0.664
Outside Diameter	3.937 Inch 100 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 65MM Bore; 100MM Outside

	Diameter; 23MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.67
Manufacturer Name	KOYO
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Calculation factor (e)	0,46
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	4800 r/min
Calculation factor (Y0)	0,72
Manufacturer Item Number	32013JR
(Grease) Lubrication Speed	3600 r/min
Basic static load rating (C0)	137 kN
Basic dynamic load rating (C)	90 kN