


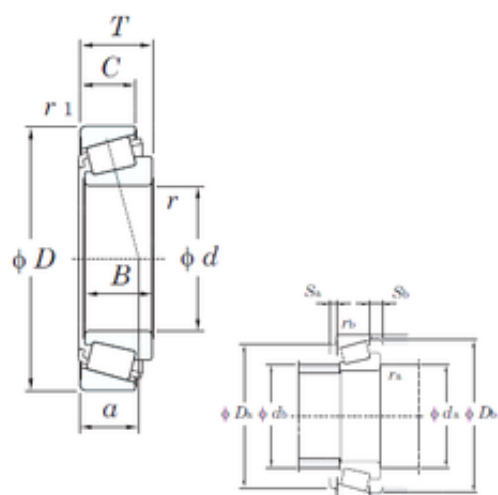

Bearing No. 32015JR

D	115 mm
d	75 mm
T	25 mm
B	25 mm
C	19 mm
a	25,1 mm
e	0.46
Cr	139
Cu	25.8
Y0	0.72
Y1	1.31
C0r	169
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
a(mm)	25.1
Da min	103 mm
da max	83 mm
Weight	0,93 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	110
db(max)	83
Da(max)	106.5
Da(min)	103
r1(min)	1.5
Sa(min)	5
Sb(min)	6
ra(max)	1.5

rb(max)	1.5
da(min)	83.5
ra max.	1,5 mm
Db min.	110 mm
Da max.	106,5 mm
da min.	83,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	4200
Category	Tapered Roller Bearings Assembly
Size (mm)	75x115x25
Component	Assembly
Inventory	0.0
Width (mm)	25
Grease lub.	3100
Bearing No.	32015JR
Basic Number	32015
Weight / LBS	2.05
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.984 Inch 25 Millimeter
Bearing number	32015JR
Precision Class	Standard
(Refer.)Mass(kg)	0.930
Outside Diameter	4.528 Inch 115 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 75MM Bore; 115MM Outside

	Diameter; 25MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.93
Manufacturer Name	KOYO
Bore Diameter (mm)	75
Outer Diameter (mm)	115
Minimum Buy Quantity	N/A
Calculation factor (e)	0,46
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	4200 r/min
Calculation factor (Y0)	0,72
Manufacturer Item Number	32015JR
(Grease) Lubrication Speed	3100 r/min
Basic static load rating (C0)	169 kN
Basic dynamic load rating (C)	110 kN