


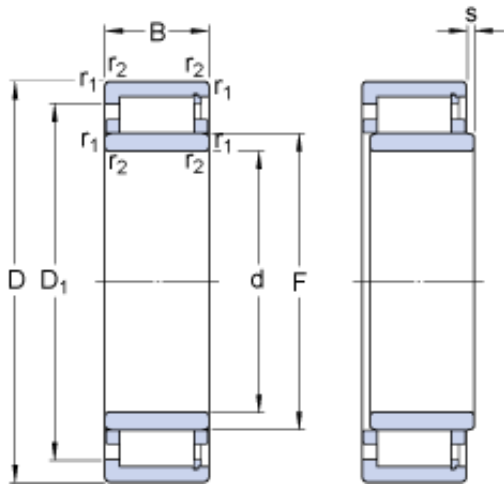

Bearing No. NUH 2322 ECMH

|                         |               |
|-------------------------|---------------|
| D                       | 240 mm        |
| d                       | 110 mm        |
| B                       | 80 mm         |
| F                       | 143 mm        |
| s                       | 2.3 mm        |
| s max.                  | 2.3 mm        |
| Size (mm)               | 240x110x80    |
| Width (mm)              | 80            |
| Mass bearing            | 17.8 kg       |
| D <sub>1</sub>          | 200 mm        |
| Limiting speed          | 4000 r/min    |
| Bearing number          | NUH 2322 ECMH |
| Reference speed         | 3000 r/min    |
| Bore Diameter (mm)      | 240           |
| r <sub>a</sub> max.     | 2.5 mm        |
| D <sub>a</sub> max.     | 225.2 mm      |
| D <sub>a</sub> min.     | 206 mm        |
| d <sub>b</sub> min.     | 146 mm        |
| d <sub>a</sub> max.     | 139 mm        |
| d <sub>a</sub> min.     | 124 mm        |
| Outer Diameter (mm)     | 110           |
| d <sub>a</sub> - max.   | 139 mm        |
| r <sub>1,2</sub> min.   | 3 mm          |
| d <sub>a</sub> - min.   | 124 mm        |
| D <sub>a</sub> - max.   | 225.2 mm      |
| r <sub>a</sub> - max.   | 2.5 mm        |
| D <sub>a</sub> - min.   | 206 mm        |
| d <sub>b</sub> - min.   | 146 mm        |
| D <sub>1</sub> ?        | 200 mm        |
| r <sub>1,2</sub> - min. | 3 mm          |

|                                  |        |
|----------------------------------|--------|
| Basic dynamic load rating C      | 830 kN |
| Basic dynamic load rating - C    | 830 kN |
| Fatigue load limit $P_u$         | 110 kN |
| Calculation factor $k_r$         | 0.2    |
| Calculation factor - $k_r$       | 0.2    |
| Fatigue load limit - $P_u$       | 110 kN |
| Basic static load rating $C_0$   | 965 kN |
| Basic static load rating - $C_0$ | 965 kN |