


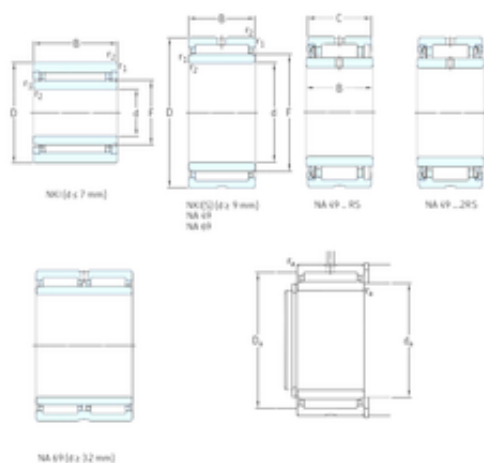

**Bearing No. NKI65/25**

|                               |            |
|-------------------------------|------------|
| S                             | 1 mm       |
| d                             | 65 mm      |
| F                             | 73 mm      |
| D                             | 90 mm      |
| B                             | 25 mm      |
| C                             | 25 mm      |
| Weight                        | 0,46 Kg    |
| da max                        | 70 mm      |
| r1 min.                       | 1 mm       |
| ra max.                       | 1 mm       |
| r2 min.                       | 1 mm       |
| Da max.                       | 85 mm      |
| Size (mm)                     | 65x90x25   |
| Width (mm)                    | 25         |
| Bearing number                | NK165/25   |
| Reference speed               | 5600 r/min |
| Bore Diameter (mm)            | 65         |
| Outer Diameter (mm)           | 90         |
| Fatigue load limit (Pu)       | 13,2       |
| Basic dynamic load rating (C) | 52,8 kN    |
| Basic static load rating (C0) | 106 kN     |