


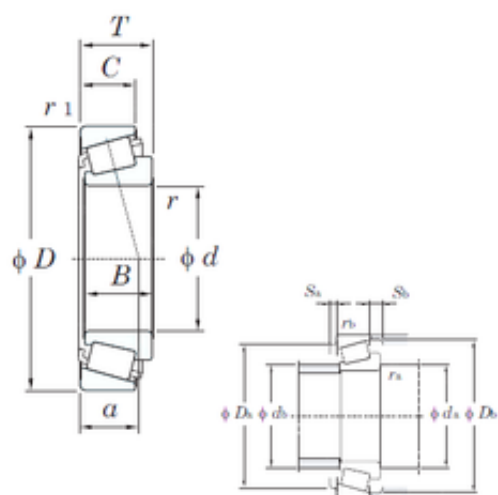

Bearing No. 32018JR

D	140 mm
d	90 mm
T	32 mm
B	32 mm
C	24 mm
a	29,8 mm
e	0.42
Cr	224
Cu	41.5
Y0	0.78
Y1	1.42
C0r	276
Bore	3.543 Inch 90 Millimeter
Noun	Bearing
a(mm)	29.8
Da min	125 mm
da max	100 mm
Weight	1,8 Kg
r min.	2 mm
r(min)	2
UNSPSC	31171516
Db(min)	134
db(max)	100
Da(max)	131.5
Da(min)	125
r1(min)	1.5
Sa(min)	6
Sb(min)	8
ra(max)	2

rb(max)	1.5
da(min)	100
ra max.	2 mm
Db min.	134 mm
Da max.	131,5 mm
da min.	100 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	3500
Category	Tapered Roller Bearings Assembly
Size (mm)	90x140x32
Component	Assembly
Inventory	0.0
Width (mm)	32
Grease lub.	2600
Bearing No.	32018JR
Basic Number	32018
Weight / LBS	3.968
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.26 Inch 32 Millimeter
Bearing number	32018JR
Precision Class	Standard
(Refer.)Mass(kg)	1.80
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 90MM Bore; 140MM Outside Diameter; 32MM Assembly Width; Single Row of Rollers

Outside Diameter	5.512 Inch 140 Millimeter
Weight / Kilogram	1.944
Manufacturer Name	KOYO
Bore Diameter (mm)	90
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,42
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3500 r/min
Calculation factor (Y0)	0,78
Manufacturer Item Number	32018JR
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	276 kN
Basic dynamic load rating (C)	178 kN