


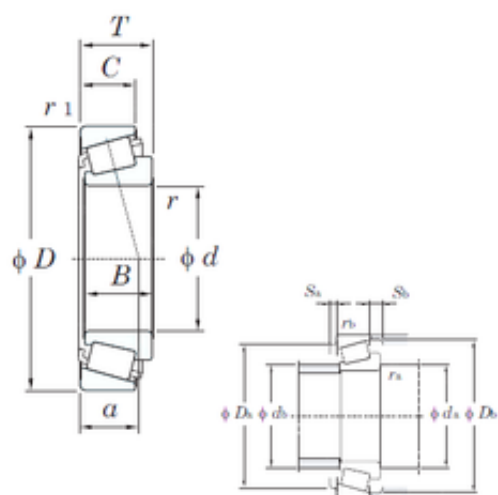

Bearing No. 32019JR

D	145 mm
d	95 mm
T	32 mm
B	32 mm
C	24 mm
a	31,2 mm
e	0.44
Cr	229
Y0	0.75
Y1	1.36
Cu	42.6
C0r	287
Bore	3.74 Inch 95 Millimeter
Noun	Bearing
a(mm)	31.2
Da min	130 mm
da max	105 mm
Weight	1,88 Kg
r min.	2 mm
r(min)	2
UNSPSC	31171516
Db(min)	140
db(max)	105
Da(max)	136.5
Da(min)	130
r1(min)	1.5
Sa(min)	6
Sb(min)	8
ra(max)	2
rb(max)	1.5

da(min)	105
ra max.	2 mm
Db min.	140 mm
Da max.	136,5 mm
da min.	105 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	3300
Category	Tapered Roller Bearings Assembly
Size (mm)	95x145x32
Component	Assembly
Inventory	0.0
Width (mm)	32
Grease lub.	2500
Bearing No.	32019JR
Basic Number	32019
Weight / LBS	4.145
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.26 Inch 32 Millimeter
Bearing number	32019JR
Precision Class	Standard
(Refer.)Mass(kg)	1.88
Outside Diameter	5.709 Inch 145 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 95MM Bore; 145MM Outside Diameter; 32MM Assembly Width; Single

	Row of Rollers
Weight / Kilogram	2.03
Manufacturer Name	KOYO
Bore Diameter (mm)	95
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Calculation factor (e)	0,44
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3300 r/min
Calculation factor (Y0)	0,75
Manufacturer Item Number	32019JR
(Grease) Lubrication Speed	2500 r/min
Basic static load rating (C0)	287 kN
Basic dynamic load rating (C)	182 kN