


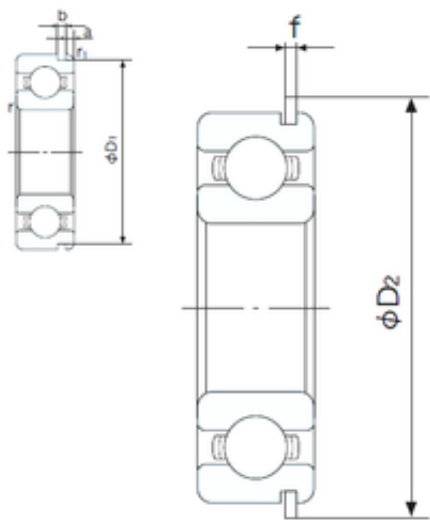

Bearing No. 6026NR

b	3.5 mm
d	130 mm
D	200 mm
B	33 mm
C	33 mm
a	5.69 mm
f	3.1 mm
r1	0.5 mm
D1	193.65 mm
D2	212.9 mm
Noun	Bearing
Bore	5.118 Inch 130 Millimeter
Width	33 mm
Weight	3.60 Kg
r min.	2 mm
UNSPSC	31171504
a (max)	5.7 mm
r1 min.	0.5 mm
b (min)	3.5 mm
D1 (max)	193.7 mm
Cy (max)	8.4 mm
Da (max)	192 mm
Category	Single Row Ball Bearing
da (min)	138 mm
Dx (min)	215 mm
ra (max)	2 mm
Inventory	0.0
Factor fo	15.7
Enclosure	Open

Bore Size	130 mm
Snap Ring	Yes
Bore Type	Cylindrical Bore
Size (mm)	130x200x33
Width (mm)	33
Configuration	Single Row
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Other Features	Deep Groove With Snap Ring
Bearing number	6026NR
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Snap Ring Width	3.1 mm
Long Description	130MM Bore; 200MM Outside Diameter; 33MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Radial Clearance	0.018 to 0.048 mm
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
Outside Diameter	7.874 Inch 200 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Weight / Kilogram	0
Manufacturer Name	NACHI

Bore Diameter (mm)	130
Static Load Rating	101,000 N
Internal Clearance	C0-Medium
Dynamic Load Rating	106,000 N
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Limiting Speed - Oil	3,800 rpm
Fillet Radius/Chamfer	2 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	3,200 rpm
Internal Special Features	No
Snap Ring Outside Diameter	212.9 mm
(Grease) Lubrication Speed	3200 r/min
Basic static load rating (C0)	101 kN
Basic dynamic load rating (C)	106 kN
Maximum Capacity / Filling Slot	No