




Bearing No. NU416-M1

E	170 mm
F	110 mm
d	80 mm
D	200 mm
B	48 mm
m	8,37 kg / Weight
s	4,6 mm / Axial displacement facility from central position
Size (mm)	80x200x48
Width (mm)	48
n_B	3750 1/min
n_G	5400 1/min / Limiting speed
D_1	159,7 mm
C_r	395000 N / Dynamic load rating (radial)
C_{Or}	365000 N / Static load rating (radial)
Bearing number	NU416-M1
C_{ur}	46000 N / Fatigue limit load, radial
r_{min}	3 mm
$r_{1 min}$	3 mm
$r_{a max}$	2,5 mm
$d_{b min}$	112 mm
$d_{a min}$	96 mm
$d_{a max}$	109 mm
$D_{a max}$	184 mm
$r_{a1 max}$	2,5 mm

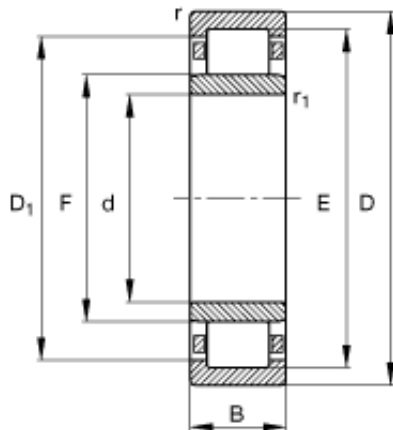

Bore Diameter (mm)	80
Outer Diameter (mm)	200