


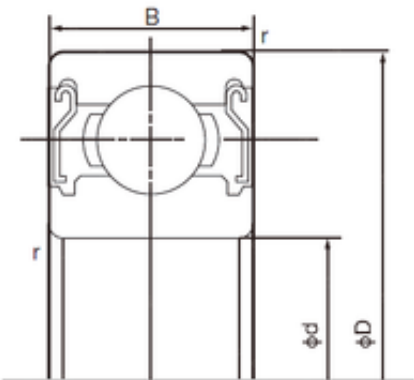

Bearing No. 6028ZZ

D	210 mm
d	140 mm
B	33 mm
C	33 mm
Noun	Bearing
Bore	5.512 Inch 140 Millimeter
Width	33 mm
r min.	2 mm
UNSPSC	31171504
Weight	4.15 Kg
da min.	148 mm
Da max.	202 mm
ra max.	2.0 mm
Category	Single Row Ball Bearing
ra (max)	2 mm
Da (max)	202 mm
da (min)	148 mm
Snap Ring	No
Enclosure	2 Metal Shields
Factor fo	15.9
Bore Type	Cylindrical Bore
Bore Size	140 mm
Inventory	0.0
Size (mm)	140x210x33
Width (mm)	33
Weight / LBS	7.6654
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6028ZZ
Other Features	Deep Groove
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Radial Clearance	0.018 to 0.048 mm
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	8.268 Inch 210 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
Manufacturer URL	http://www.nachi-america.com
Long Description	140MM Bore; 210MM Outside Diameter; 33MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer Name	NACHI
Weight / Kilogram	0
Bore Diameter (mm)	140
Static Load Rating	109,000 N
Internal Clearance	C0-Medium
Dynamic Load Rating	110,000 N
Outer Diameter (mm)	210
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	2 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	3,000 rpm
Internal Special	No

Features	
Basic static load rating (C0)	109 kN
Basic dynamic load rating (C)	110 kN
Maximum Capacity / Filling Slot	No