


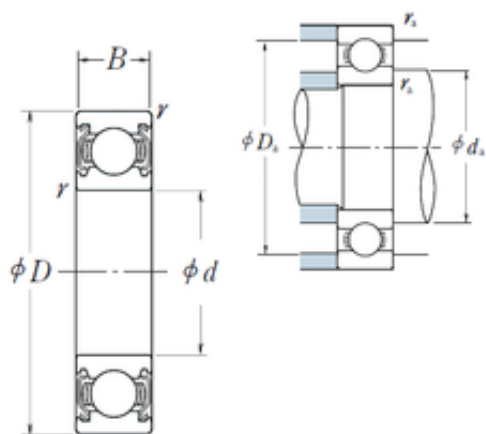

Bearing No. 6028ZZ

D	210 mm
d	140 mm
B	33 mm
C	33 mm
r	2
Z_	16
D_	210
B_	33
ra	2
C0	109
fo	16
DI_	154.362
SRI	10.68
SRE	10.68
D_a	201
DA_	20.638
DE_	195.638
SRIN	-0.04
Noun	Bearing
SBRG	10
yobi	6028ZZ
SDM_	175
KBRG	6141
SREX	0.04
bomp	0
mass	3.48
Bore	5.512 Inch 140 Millimeter
SRIX	0.04
SREN	-0.04

LangID	1
da min	149
r min.	2 mm
da max	158,5 mm
ALPHA_	0
C_conv	110000
UNSPSC	31171504
Weight	3,48 Kg
ra max.	2 mm
hidYobi	6028ZZ
da min.	149 mm
series:	60
GRS rpm	2800
Da max.	201 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	9.0
Enclosure	2 Metal Shields
Size (mm)	140x210x33
Snap Ring	No
Prod_Type3	DGBB_SR_ZZ
Width (mm)	33
bore type:	Round
Weight / LBS	3.35
maximum rpm:	3400 RPM
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6028ZZ
Keyword String	Ball
fillet radius:	2 mm

cage material:	Steel
overall width:	33 mm
bore diameter:	140 mm
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Long Description	140MM Bore; 210MM Outside Diameter; 33MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	8.268 Inch 210 Millimeter
Outer Race Width	1.299 Inch 33 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	3.58
outside diameter:	210 mm
outer ring width:	33 mm
precision rating:	Not Rated
Internal Clearance	C0-Medium
Bore Diameter (mm)	140
internal clearance:	C0
Outer Diameter (mm)	210
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	109000 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	110000 N
Manufacturer Item	6028ZZ

Number	
Internal Special Features	No
(Grease) Lubrication Speed	2 800 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	109 kN
Basic dynamic load rating (C)	110 kN
Maximum Capacity / Filling Slot	No