


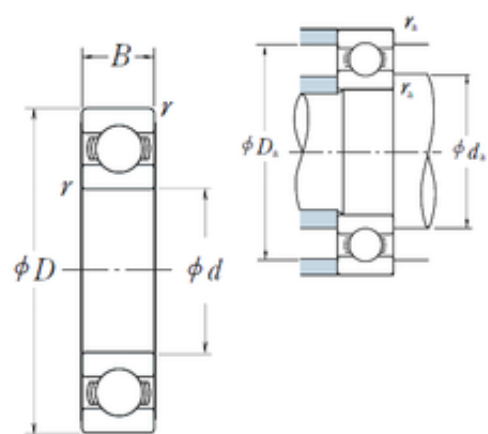

Bearing No. 6030

r	2.1
d	150 mm
D	225 mm
B	35 mm
C	35 mm
fo	15.9
C0	126
ra	2
B_	35
Z_	16
D_	225
SRI	11.5
DA_	22.225
SRE	11.5
DE_	209.725
DI_	165.275
D_a	214
Bore	5.906 Inch 150 Millimeter
SREN	-0.04
SRIN	-0.04
mass	4.24
bomp	0
Noun	Bearing
yobi	6030
SRIX	0.04
SDM_	187.5
SREX	0.04
KBRG	6101
SBRG	10

C_conv	126000
ALPHA_	0
Weight	4,24 Kg
da max	170 mm
r min.	2,1 mm
da min	161
UNSPSC	31171504
LangID	1
hidYobi	6030
GRS rpm	2600
Oil rpm	3000
Da max.	214 mm
ra max.	2 mm
da min.	161 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	150x225x35
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	35
Prod_Type3	DGBB_SR_OT
Weight / LBS	9.3492
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6030
Keyword String	Ball
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	8.858 Inch 225 Millimeter

Long Description	150MM Bore; 225MM Outside Diameter; 35MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.378 Inch 35 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	4.1
Internal Clearance	C0-Medium
Bore Diameter (mm)	150
Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	3 000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	2 600 r/min
Basic static load rating (C0)	126 kN
Basic dynamic load rating (C)	126 kN
Maximum Capacity / Filling Slot	No