


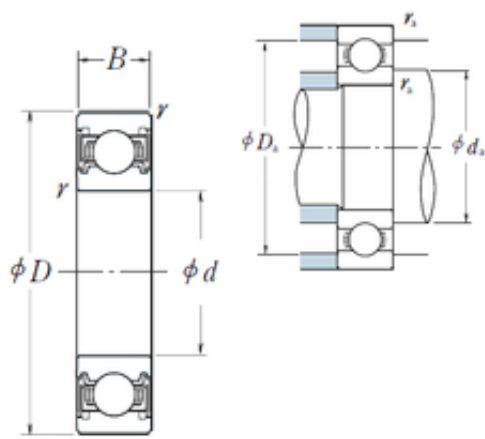

Bearing No. 6030VV

r	2.1
d	150 mm
D	225 mm
B	35 mm
C	35 mm
fo	15.9
ra	2
D_	225
C0	126
B_	35
Z_	16
SRI	11.5
DE_	209.725
DA_	22.225
DI_	165.275
SRE	11.5
D_a	214
SREX	0.04
mass	4.24
SRIN	-0.04
bomp	0
SREN	-0.04
yobi	6030VV
SDM_	187.5
KBRG	6151
SBRG	10
SRIX	0.04
C_conv	126000
ALPHA_	0
da min	161

Weight	4,24 Kg
r min.	2,1 mm
LangID	1
da max	170 mm
ra max.	2 mm
da min.	161 mm
Da max.	214 mm
GRS rpm	2600
hidYobi	6030VV
hidTable	ecat_NSRDGB
Size (mm)	150x225x35
Prod_Type3	DGBB_SR_VV
Width (mm)	35
Bearing number	6030VV
Bore Diameter (mm)	150
Outer Diameter (mm)	225
(Grease) Lubrication Speed	2 600 r/min
Basic dynamic load rating (C)	126 kN
Basic static load rating (C0)	126 kN