


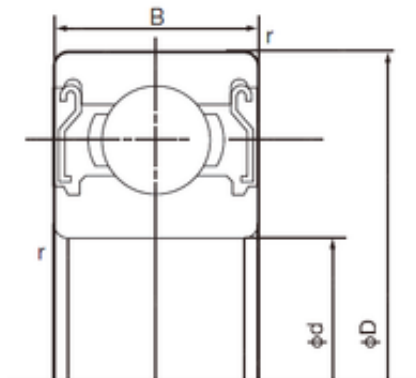

Bearing No. 6030ZZ

D	225 mm
d	150 mm
B	35 mm
C	35 mm
Width	35 mm
Weight	4.48 Kg
r min.	2.1 mm
da min.	159 mm
ra max.	2.0 mm
Da max.	216 mm
ra (max)	2 mm
da (min)	159 mm
Da (max)	216 mm
Factor fo	15.9
Size (mm)	150x225x35
Bore Type	Cylindrical Bore
Enclosure	Double Shield
Bore Size	150 mm
Width (mm)	35
Configuration	Single Row
Bearing number	6030ZZ
Radial Clearance	0.018 to 0.053 mm
Outside Diameter	225 mm
Static Load Rating	126,000 N
Bore Diameter (mm)	150
Dynamic Load Rating	126,000 N
Outer Diameter (mm)	225
Fillet Radius/Chamfer	2.1 mm
Limiting Speed - Grease	2,800 rpm
Basic dynamic load	126 kN

rating (C)	
Basic static load rating (C0)	126 kN