


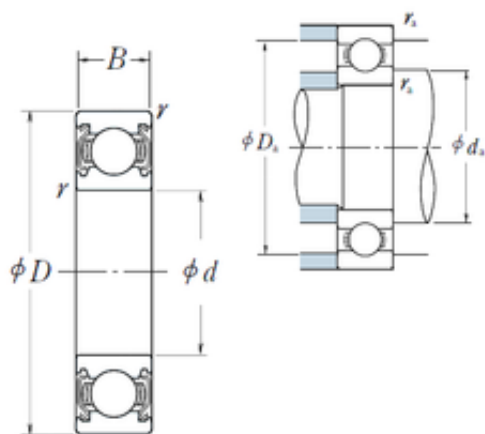

Bearing No. 6030ZZ

D	225 mm
d	150 mm
B	35 mm
C	35 mm
r	2.1
ra	2
Z_	16
B_	35
D_	225
fo	15.9
C0	126
D_a	214
DE_	209.725
DI_	165.275
SRE	11.5
SRI	11.5
DA_	22.225
SRIX	0.04
bomp	0
SRIN	-0.04
Noun	Bearing
Bore	5.906 Inch 150 Millimeter
SREN	-0.04
SREX	0.04
mass	4.24
KBRG	6141
SBRG	10
yobi	6030ZZ
SDM_	187.5

Weight	4,24 Kg
LangID	1
r min.	2,1 mm
ALPHA_	0
UNSPSC	31171504
da min	161
C_conv	126000
da max	170 mm
da min.	161 mm
GRS rpm	2600
hidYobi	6030ZZ
ra max.	2 mm
Da max.	214 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	150x225x35
Inventory	0.0
Snap Ring	No
Width (mm)	35
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	4.1
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6030ZZ
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	1.378 Inch 35 Millimeter

Outside Diameter	8.858 Inch 225 Millimeter
Long Description	150MM Bore; 225MM Outside Diameter; 35MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer Name	NSK
Weight / Kilogram	0.52
Internal Clearance	C0-Medium
Bore Diameter (mm)	150
Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6030ZZ
Internal Special Features	No
(Grease) Lubrication Speed	2 600 r/min
Basic static load rating (C0)	126 kN
Basic dynamic load rating (C)	126 kN
Maximum Capacity / Filling Slot	No