


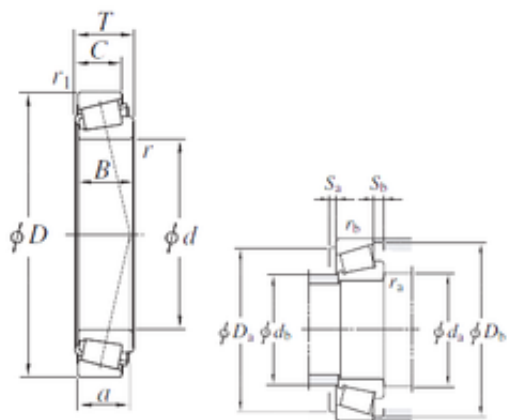

Bearing No. 32030JR

C	36 mm
d	150 mm
D	225 mm
T	48 mm
B	48 mm
a	48,8 mm
e	0.46
Cr	492
Y0	0.72
Y1	1.31
Cu	79.6
Db	216 mm
C0r	668
Bore	5.906 Inch 150 Millimeter
Noun	Bearing
a(mm)	48.8
r(min)	3
UNSPSC	31171516
Weight	6,41 Kg
r min.	3 mm
Da min	200 mm
da max	164 mm
Db min.	216 mm
ra max.	2,5 mm
r1 min.	2,5 mm
r1(min)	2.5
r2 min.	2,5 mm
da(min)	164
da min.	164 mm

db(max)	164
Da(max)	213
Da(min)	200
Db(min)	216
Sa(min)	8
Sb(min)	12
rb(max)	2
Da max.	213 mm
db max.	164 mm
rb max.	2 mm
ra(max)	2.5
Category	Tapered Roller Bearings Assembly
Oil lub.	2000
Inventory	0.0
Component	Assembly
Size (mm)	150x225x48
Width (mm)	48
Bearing No.	32030JR
Grease lub.	1500
Weight / LBS	14.132
Basic Number	32030
Inch - Metric	Metric
Product Group	B04334
Bearing number	32030JR
Assembly Width	1.89 Inch 48 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Outside Diameter	8.858 Inch 225 Millimeter
Long Description	Assembly; Standard Precision; 150MM Bore;

	225MM Outside Diameter; 48MM Assembly Width; Single Row of Rollers
(Refer.)Mass(kg)	6.41
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	6.901
Bore Diameter (mm)	150
Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,46
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,72
(Oil) Lubrication Speed	2000 r/min
Manufacturer Item Number	32030JR
(Grease) Lubrication Speed	1500 r/min
Basic static load rating (C0)	668 kN
Basic dynamic load rating (C)	391 kN