


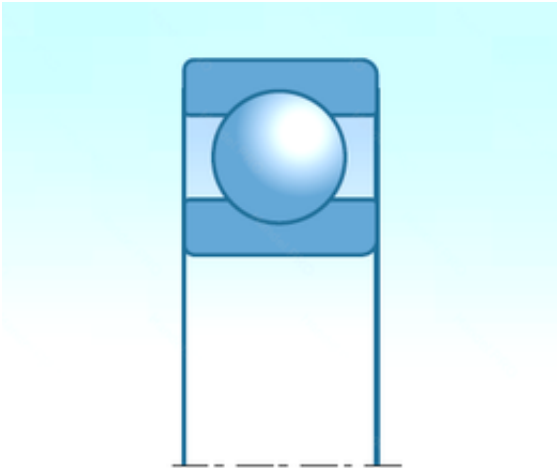

Bearing No. 6034ZZ

C	42,000 mm
d	170,000 mm
B	42,000 mm
D	260,000 mm
Noun	Bearing
Bore	6.693 Inch 170 Millimeter
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	170x260x42
Enclosure	2 Metal Shields
Snap Ring	No
Inventory	0.0
Width (mm)	42,000
bore type:	Round
maximum rpm:	2800 RPM
Weight / LBS	15.565
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6034ZZ
bore diameter:	170 mm
overall width:	42 mm
fillet radius:	2.1 mm
cage material:	Steel
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	170MM Bore; 260MM Outside Diameter; 42MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Outside Diameter	10.236 Inch 260 Millimeter
Outer Race Width	1.654 Inch 42 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Name	NTN
outer ring width:	42 mm
inner ring width:	42 mm
Weight / Kilogram	7.06
bearing material:	High Carbon Chrome Steel
outside diameter:	260 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	170,000
Outer Diameter (mm)	260,000
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2400 rpm
static load capacity:	172000 N

dynamic load capacity:	168000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6034ZZ
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No