


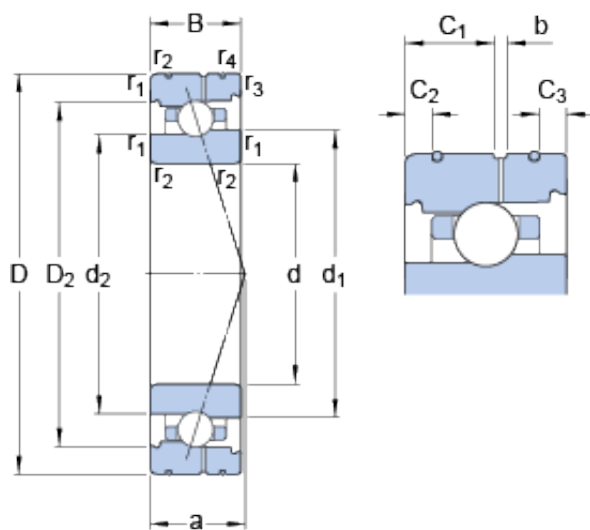

Bearing No. 7016 ACB/HCP4AL

b	2.5 mm
d	80 mm
a	35.1 mm
B	22 mm
D	125 mm
Ball - z	27
Size (mm)	125x80x22
Width (mm)	22
Mass bearing	0.86 kg
d ₂	94.3 mm
D ₂	111.4 mm
d _n	98 mm
C ₁	11.1 mm
C ₂	4.7 mm
C ₃	3.2 mm
C ₂	4.7 mm
C ₁	11.1 mm
d _n	98 mm
D ₂	111.4 mm
d ₂	94.3 mm
d ₁	96.7 mm
d ₁	96.7 mm
C ₃	3.2 mm
Bearing number	7016 ACB/HCP4AL
Preload class A	159 N/micron
Preload class B	204 N/micron
G _{ref}	10.49 cm3
Preload class C	309 N/micron
Number of balls z	27

Bore Diameter (mm)	125
r_b max.	0.6 mm
r_a max.	1 mm
D_b max.	121.8 mm
D_a max.	119 mm
d_a min.	86 mm
d_b min.	86 mm
Outer Diameter (mm)	80
r_b - max.	0.6 mm
$r_{3,4}$ min.	0.6 mm
d_b - min.	86 mm
D_a - max.	119 mm
D_b - max.	121.8 mm
$r_{1,2}$ min.	1.1 mm
d_a - min.	86 mm
r_a - max.	1 mm
Ball - D_w	9.525 mm
Calculation factor f	1.07
Calculation factor e	0.68
$r_{3,4}$ - min.	0.6 mm
Calculation factor - f	1.07
$r_{1,2}$ - min.	1.1 mm
Calculation factor - e	0.68
Ball diameter D_w	9.525 mm
Basic dynamic load rating C	30.2 kN
Preload class C G_C	900 N
Basic dynamic load rating - C	25.1 kN
Preload class B G_B	300 N
Preload class A G_A	150 N
Preload class C - G_C	900 N

Preload class A - G_A	150 N
Preload class B - G_B	300 N
Calculation factor f_1	0.99
Fatigue load limit P_u	0.9 kN
Calculation factor f_{HC}	1.01
Calculation factor f_{2C}	1.05
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Limiting speed for oil lubrication	22000 mm/min
Calculation factor - Y_1	0.92
Fatigue load limit - P_u	0.9 kN
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{HC}	1.01
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Limiting speed for grease lubrication	15000 r/min
Basic static load rating C_0	32.5 kN
Static axial stiffness, preload class A	159 N/ μ m
Static axial stiffness, preload class C	309 N/ μ m
Static axial stiffness, preload class B	204 N/ μ m
Attainable speed for grease lubrication	15000 r/min

Basic static load rating - C_0	21.6 kN
Attainable speed for oil-air lubrication	22000 r/min
Reference grease quantity G_{ref}	10.49 cm ³
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67