


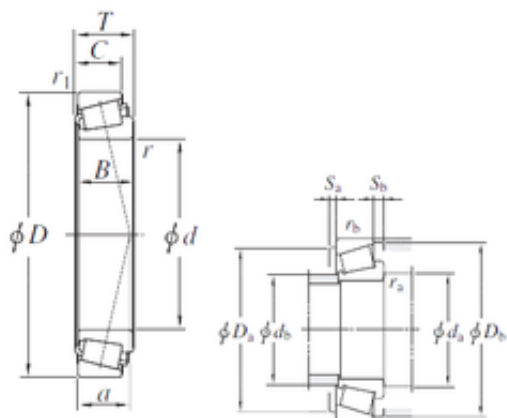

Bearing No. 32040JR

C	53 mm
d	200 mm
D	310 mm
T	70 mm
B	70 mm
a	66,9 mm
e	0.43
Cr	949
Y0	0.77
Y1	1.39
Cu	146
Db	297 mm
C0r	1340
Bore	7.874 Inch 200 Millimeter
Noun	Bearing
a(mm)	66.9
r(min)	3
UNSPSC	31171516
Weight	19,1 Kg
r min.	3 mm
Da min	273 mm
da max	221 mm
Db min.	297 mm
ra max.	2,5 mm
r1 min.	2,5 mm
r1(min)	2.5
r2 min.	2,5 mm
da(min)	214
da min.	214 mm

db(max)	221
Da(max)	298
Da(min)	273
Db(min)	297
Sa(min)	11
Sb(min)	17
rb(max)	2
Da max.	298 mm
db max.	221 mm
rb max.	2 mm
ra(max)	2.5
Category	Tapered Roller Bearings Assembly
Oil lub.	1400
Inventory	0.0
Component	Assembly
Size (mm)	200x310x70
Width (mm)	70
Bearing No.	32040JR
Grease lub.	1100
Weight / LBS	42.108
Basic Number	32040
Inch - Metric	Metric
Product Group	B04334
Bearing number	32040JR
Assembly Width	2.756 Inch 70 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Long Description	Assembly; Standard Precision; 200MM Bore; 310MM Outside Diameter; 70MM

	Assembly Width; Single Row of Rollers
Outside Diameter	12.205 Inch 310 Millimeter
(Refer.)Mass(kg)	19.1
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	21.619
Bore Diameter (mm)	200
Outer Diameter (mm)	310
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,43
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,77
(Oil) Lubrication Speed	1400 r/min
Manufacturer Item Number	32040JR
(Grease) Lubrication Speed	1100 r/min
Basic static load rating (C0)	1340 kN
Basic dynamic load rating (C)	755 kN