


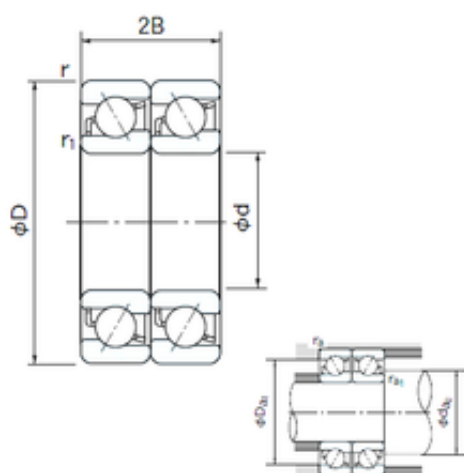

**Bearing No. 7016DT**

|                               |            |
|-------------------------------|------------|
| a                             | 18.6 mm    |
| d                             | 80 mm      |
| D                             | 125 mm     |
| B                             | 22 mm      |
| C                             | 22 mm      |
| 2B                            | 44 mm      |
| Weight                        | 0.925 Kg   |
| r min.                        | 1.1 mm     |
| da min.                       | 86 mm      |
| ra max.                       | 0.6 mm     |
| Da max.                       | 121 mm     |
| r1 min.                       | 0.6 mm     |
| Size (mm)                     | 80x125x22  |
| Width (mm)                    | 22         |
| Bearing number                | 7016DT     |
| Angle (?)                     | 30 °       |
| Bore Diameter (mm)            | 80         |
| Outer Diameter (mm)           | 125        |
| (Grease) Lubrication Speed    | 3500 r/min |
| Basic dynamic load rating (C) | 86,5 kN    |
| Basic static load rating (C0) | 101 kN     |