


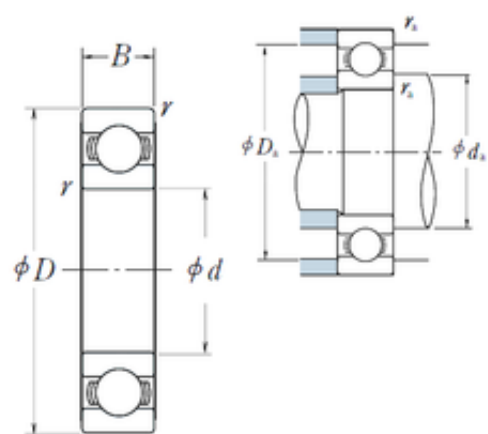

Bearing No. 6048

r	3
d	240 mm
D	360 mm
B	56 mm
C	56 mm
C0	296
Z_	14
ra	2.5
B_	56
D_	360
fo	15.9
D_a	347
SRE	18.89
DE_	336.512
DA_	36.512
DI_	263.488
SRI	18.89
mass	19.9
SRIN	-0.065
SBRG	10
SRIX	0.065
KBRG	6104
SREN	-0.065
yobi	6048
bomp	0
SREX	0.065
SDM_	300
r min.	3 mm
ALPHA_	0
da min	253

C_conv	244000
Weight	19,9 Kg
LangID	1
Oil rpm	1900
GRS rpm	1500
hidYobi	6048
ra max.	2,5 mm
Da max.	340 mm
da min.	264 mm
hidTable	ecat_NSRDGB
Size (mm)	240x360x56
Prod_Type3	DGBB_SR_OT
Width (mm)	56
Bearing number	6048
Bore Diameter (mm)	240
Outer Diameter (mm)	360
Basic static load rating (C0)	296 kN
Basic dynamic load rating (C)	244 kN