


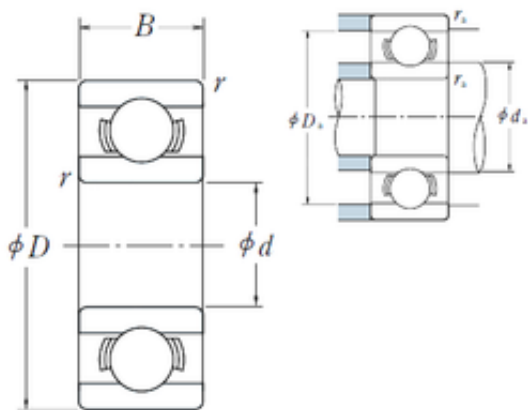

Bearing No. 605

r	0.2
d	5 mm
D	14 mm
B	5 mm
C	5 mm
B0	5
fo	12.725
ra	0.2
Cr	135
C0	0.505
B_	5
da	6.6
D_	14
Z_	7
DE_	11.881
D_a	12.4
DI_	7.119
SRE	1.33
DA_	2.381
C0r	52
SRI	1.33
SRIN	0
KBRG	6101
SDM_	9.5
yobi	605
mass	3.54
SREN	0
SREX	0.02
SRIX	0.02
LangID	1

r min.	0,2 mm
Weight	0,00354 Kg
ra max.	0,2 mm
GRS rpm	40000
Da max.	12,4 mm
da min.	6,6 mm
Oil rpm	50000
hidYobi	605
hidTable	ecat_NSESBM
Size (mm)	5x14x5
Prod_Type3	ESM_MD_OT
Width (mm)	5
Bearing number	605
Bore Diameter (mm)	5
Outer Diameter (mm)	14
(Grease) Lubrication Speed	40 000 r/min
Basic dynamic load rating (C)	1,33 kN
Basic static load rating (C0)	0,505 kN