


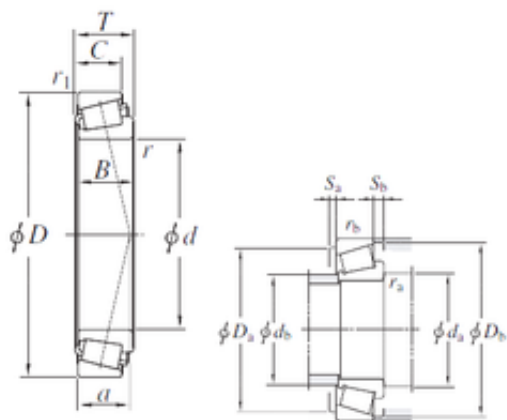

Bearing No. 32052JR

e	0.43
d	260 mm
D	400 mm
T	87 mm
B	87 mm
C	65 mm
a	85 mm
Y0	0.76
Y1	1.38
Db	383 mm
Cu	221
Cr	1470
C0r	2170
Noun	Bearing
Bore	10.236 Inch 260 Millimeter
a(mm)	85.0
da max	287 mm
Da min	352 mm
UNSPSC	31171516
r min.	5 mm
Weight	39,5 Kg
r(min)	5
Db(min)	383
r1(min)	4
da(min)	282
db(max)	287
Da(max)	382
Da(min)	352
ra(max)	4

Sa(min)	14
r1 min.	4 mm
da min.	282 mm
Da max.	382 mm
db max.	287 mm
Db min.	383 mm
ra max.	4 mm
r2 min.	4 mm
rb(max)	3
rb max.	3 mm
Sb(min)	22
Category	Tapered Roller Bearings Assembly
Oil lub.	1000
Component	Assembly
Inventory	0.0
Size (mm)	260x400x87
Width (mm)	87
Grease lub.	770
Bearing No.	32052JR
Basic Number	32052
Weight / LBS	87.083
Product Group	B04334
Inch - Metric	Metric
Bearing number	32052JR
Assembly Width	3.425 Inch 87 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Outside Diameter	15.748 Inch 400 Millimeter
Long Description	Assembly; Standard

	Precision; 260MM Bore; 400MM Outside Diameter; 87MM Assembly Width; Single Row of Rollers
(Refer.)Mass(kg)	39.5
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	41.688
Bore Diameter (mm)	260
Outer Diameter (mm)	400
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,43
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	1000 r/min
Manufacturer Item Number	32052JR
(Grease) Lubrication Speed	770 r/min
Basic static load rating (C0)	2170 kN
Basic dynamic load rating (C)	1170 kN