


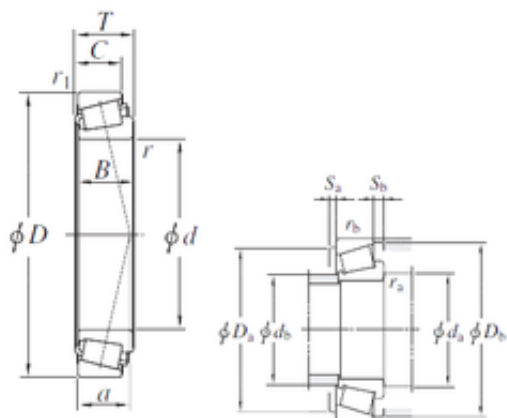

Bearing No. 32056JR

C	65 mm
d	280 mm
D	420 mm
T	87 mm
B	87 mm
a	91,1 mm
e	0.46
Cr	1510
Y0	0.72
Y1	1.31
Db	402 mm
Cu	230
C0r	2280
Bore	11.024 Inch 280 Millimeter
Noun	Bearing
a(mm)	91.1
Weight	41,7 Kg
UNSPSC	31171516
r(min)	5
Da min	370 mm
da max	305 mm
r min.	5 mm
da(min)	302
Db(min)	402
r1(min)	4
db(max)	305
Da(max)	402
Da(min)	370
ra(max)	4

Sa(min)	14
r1 min.	4 mm
da min.	302 mm
Da max.	402 mm
db max.	305 mm
Db min.	402 mm
ra max.	4 mm
r2 min.	4 mm
rb(max)	3
rb max.	3 mm
Sb(min)	22
Category	Tapered Roller Bearings Assembly
Oil lub.	960
Component	Assembly
Inventory	0.0
Size (mm)	280x420x87
Width (mm)	87
Grease lub.	720
Bearing No.	32056JR
Basic Number	32056
Weight / LBS	91.933
Product Group	B04334
Inch - Metric	Metric
Bearing number	32056JR
Assembly Width	3.425 Inch 87 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Long Description	Assembly; Standard Precision; 280MM Bore; 420MM Outside Diameter; 87MM

	Assembly Width; Single Row of Rollers
Outside Diameter	16.535 Inch 420 Millimeter
(Refer.)Mass(kg)	41.7
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	44.064
Bore Diameter (mm)	280
Outer Diameter (mm)	420
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,46
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,72
(Oil) Lubrication Speed	960 r/min
Manufacturer Item Number	32056JR
(Grease) Lubrication Speed	720 r/min
Basic static load rating (C0)	2280 kN
Basic dynamic load rating (C)	1200 kN