


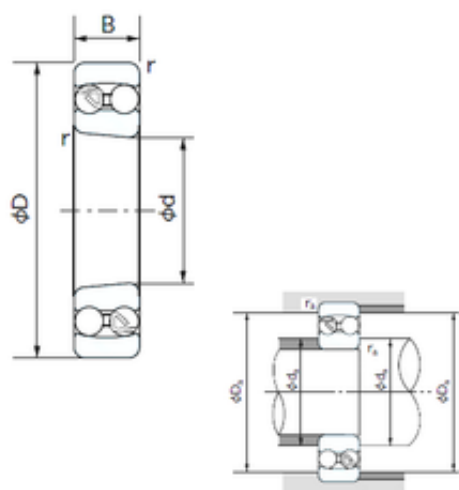

Bearing No. 2316K

D	170 mm
d	80 mm
B	58 mm
C	58 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
Weight	6.12 Kg
UNSPSC	31171532
Da max.	158 mm
r1 min.	2.1 mm
da min.	92 mm
ra max.	2 mm
Category	Self Aligning Ball Bearings
Inventory	0.0
Enclosure	Open
Size (mm)	80x170x58
Width (mm)	58
Weight / LBS	13.49227
Product Group	B00152
Inch - Metric	Metric
Cage Material	Steel
Other Features	Allowable Misalignment 3 Deg 1:12 Taper
Adapter Sleeve	H-2316X
Bearing number	2316K
Keyword String	Self Aligning
Precision Class	ABEC 1 ISO P0
Mounting Method	Tapered Adapter
Rolling Element	Ball Bearing
Long Description	80MM Bore; Tapered

	Adapter Mount; 170MM Outside Diameter; 58MM Inner Race Width; 58MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Inner Race Width	2.283 Inch 58 Millimeter
Outer Race Width	2.283 Inch 58 Millimeter
Manufacturer URL	http://www.nachi.com
Outside Diameter	6.693 Inch 170 Millimeter
Weight / Kilogram	0
Manufacturer Name	NACHI
Internal Clearance	C0-Medium
Bore Diameter (mm)	80
Outer Diameter (mm)	170
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Calculation factor (e)	0.40
Number of Rows of Balls	Double Row
Calculation factor (Y1)	1.6
Calculation factor (Y0)	1.6
(Oil) Lubrication Speed	3900 r/min
(Grease) Lubrication Speed	3100 r/min
Basic static load rating (C0)	45,5 kN
Basic dynamic load rating (C)	126 kN