


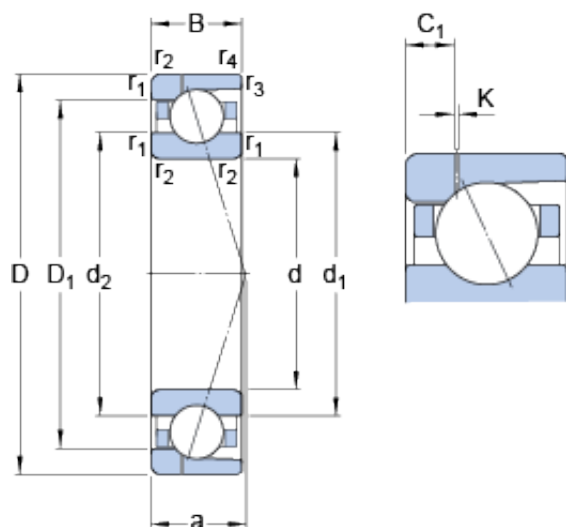

Bearing No. 7017 CD/HCP4AH1

K	0.5 mm
a	25.5 mm
d	85 mm
D	130 mm
B	22 mm
Ball - z	21
Size (mm)	130x85x22
Width (mm)	22
Mass bearing	0.74 kg
d_n	101.9 mm
D_1	116.1 mm
d_1	98.9 mm
C_1	5.9 mm
D_1	116.1 mm
d_2	98.9 mm
C_1	5.9 mm
d_1	98.9 mm
d_n	101.9 mm
d_2	98.9 mm
Bearing number	7017 CD/HCP4AH1
Preload class A	107 N/micron
Preload class D	298 N/micron
Preload class B	146 N/micron
Preload class C	205 N/micron
G_{ref}	11.7 cm ³
Number of balls z	21
r_b max.	0.6 mm
r_a max.	1 mm
D_b max.	126 mm

D_a max.	124 mm
d_b min.	91 mm
d_a min.	91 mm
Bore Diameter (mm)	130
Outer Diameter (mm)	85
d_b - min.	91 mm
r_b - max.	0.6 mm
$r_{1,2}$ min.	1.1 mm
d_a - min.	91 mm
Calculation factor f	1.15
r_a - max.	1 mm
$r_{3,4}$ min.	0.6 mm
D_a - max.	124 mm
Ball - D_w	14.288 mm
D_b - max.	126 mm
Calculation factor - f	1.15
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1.1 mm
Ball diameter D_w	14.288 mm
Basic dynamic load rating C	67.6 kN
Preload class D G_D	2000 N
Preload class A G_A	250 N
Preload class C G_C	1000 N
Preload class B G_B	500 N
Basic dynamic load rating - C	67.6 kN
Preload class A - G_A	250 N
Preload class B - G_B	500 N
Preload class C - G_C	1000 N
Preload class D - G_D	2000 N
Fatigue load limit P_u	2.65 kN

Calculation factor f_1	1
Calculation factor f_0	15.7
Calculation factor f_{2D}	1.09
Calculation factor - f	1
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1.02
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1
Limiting speed for oil lubrication	19000 mm/min
Fatigue load limit - P_u	2.6 kN
Calculation factor - f_0	15.7
Calculation factor - f_{2D}	1.09
Calculation factor - f_{HC}	1.02
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Limiting speed for grease lubrication	12000 r/min
Basic static load rating C_0	65.5 kN
Static axial stiffness, preload class B	146 N/ μ m
Static axial stiffness, preload class C	205 N/ μ m
Static axial stiffness, preload class A	107 N/ μ m
Static axial stiffness, preload class D	298 N/ μ m
Attainable speed for grease lubrication	12000 r/min
Attainable speed for oil-air lubrication	19000 r/min



Basic static load rating - C_0	65.5 kN
Reference grease quantity G_{ref}	11.7 cm ³