


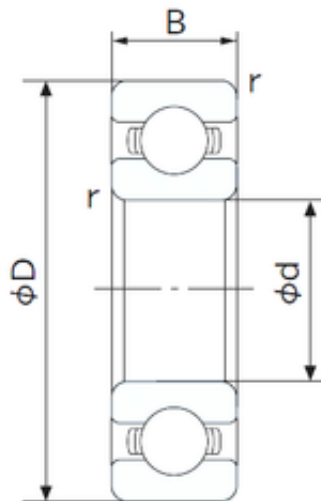

**Bearing No. 6056**

|                         |                   |
|-------------------------|-------------------|
| D                       | 420 mm            |
| d                       | 280 mm            |
| B                       | 65 mm             |
| C                       | 65 mm             |
| Width                   | 65 mm             |
| Weight                  | 31.0 Kg           |
| r min.                  | 4 mm              |
| da min.                 | 293 mm            |
| Da max.                 | 405 mm            |
| ra max.                 | 3.0 mm            |
| ra (max)                | 3 mm              |
| da (min)                | 293 mm            |
| Da (max)                | 405 mm            |
| Bore Size               | 280 mm            |
| Factor fo               | 16.1              |
| Size (mm)               | 280x420x65        |
| Enclosure               | Open              |
| Bore Type               | Cylindrical Bore  |
| Width (mm)              | 65                |
| Configuration           | Single Row        |
| Bearing number          | 6056              |
| Radial Clearance        | 0.035 to 0.105 mm |
| Outside Diameter        | 420 mm            |
| Static Load Rating      | 350,000 N         |
| Bore Diameter (mm)      | 280               |
| Dynamic Load Rating     | 266,000 N         |
| Outer Diameter (mm)     | 420               |
| Limiting Speed - Oil    | 1,600 rpm         |
| Fillet Radius/Chamfer   | 4 mm              |
| Limiting Speed - Grease | 1,400 rpm         |
|                         |                   |

|                               |            |
|-------------------------------|------------|
| (Grease) Lubrication Speed    | 1300 r/min |
| Basic static load rating (C0) | 350 kN     |
| Basic dynamic load rating (C) | 266 kN     |