


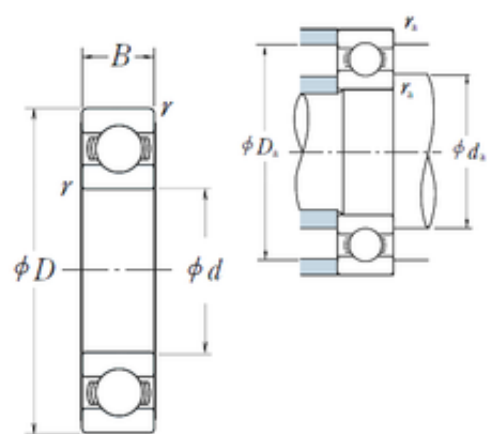

Bearing No. 6056

r	4
d	280 mm
D	420 mm
B	65 mm
C	65 mm
C0	410
Z_	15
ra	3
B_	65
D_	420
fo	16
D_a	404
SRE	21.36
DE_	391.275
DA_	41.275
DI_	308.725
SRI	21.36
mass	31.2
SRIN	-0.08
SBRG	10
SRIX	0.08
KBRG	6104
SREN	-0.08
yobi	6056
bomp	0
SREX	0.08
SDM_	350
r min.	4 mm
ALPHA_	0
da min	296

C_conv	300000
Weight	31,2 Kg
LangID	1
Oil rpm	1600
GRS rpm	1300
hidYobi	6056
ra max.	3 mm
Da max.	395 mm
da min.	308 mm
hidTable	ecat_NSRDGB
Size (mm)	280x420x65
Prod_Type3	DGBB_SR_OT
Width (mm)	65
Bearing number	6056
Bore Diameter (mm)	280
Outer Diameter (mm)	420
Basic static load rating (C0)	410 kN
Basic dynamic load rating (C)	300 kN