


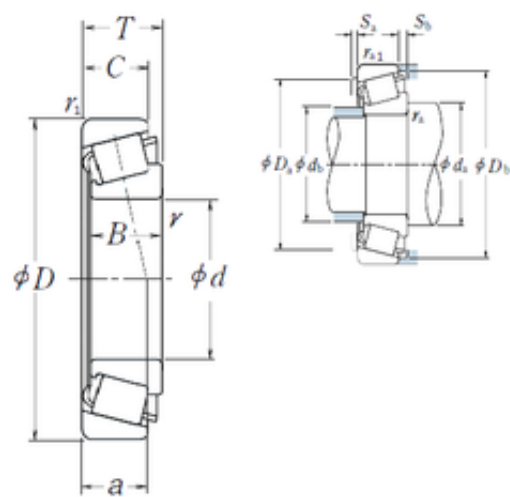

Bearing No. 32084

D	620 mm
d	420 mm
T	125 mm
B	118 mm
C	100 mm
a	120 mm
e	0.37
Cr	204000
Y0	0.88
db	463
da	453
Y1	1.6
B_	118
Sb	25
C0	4200
Sa	6.5
D_	620
Z_	30
C_	100
C0r	430000
DA_	43.814
Iso	-
DE_	560.533
D_b	586
DI_	475.156
SBRG	20
SDM_	517.845
D_a2	552
KBRG	3111
yobi	32084

D_a1	598
mass	121
TC-RA	1201.102
r min.	6 mm
Weight	121 Kg
TC-DA1	45.417
TC-DA2	42.211
TC-SLR	85
Da min	552 mm
LangID	1
ALPHA_	14
Db min.	586 mm
Oil rpm	630
db max.	463 mm
Da max.	598 mm
ra max.	5 mm
hidYobi	32084
da min.	453 mm
T-ALP21	28
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	450
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	5
outer rb	4
TC-BET22	10

Size (mm)	420x620x125
Width (mm)	125
Prod_Type3	TRBSR_MD_A
Bearing number	32084
Bore Diameter (mm)	420
Outer Diameter (mm)	620
Calculation factor (e)	0,37
Calculation factor (Y0)	0,88
(Oil) Lubrication Speed	630 r/min
(Grease) Lubrication Speed	450 r/min
Basic dynamic load rating (C)	2000 kN
Basic static load rating (C0)	4200 kN