


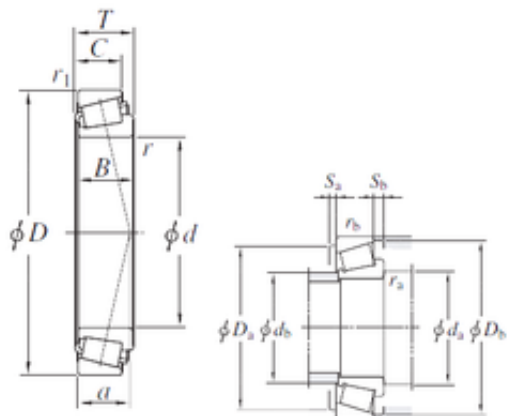

Bearing No. EE655270/655345

|                               |                    |
|-------------------------------|--------------------|
| C                             | 69,85 mm           |
| d                             | 685,8 mm           |
| D                             | 876,3 mm           |
| T                             | 93,663 mm          |
| B                             | 92,075 mm          |
| a                             | 149,1 mm           |
| Db                            | 840 mm             |
| Da min                        | 830 mm             |
| Weight                        | 132 Kg             |
| r min.                        | 6,4 mm             |
| db max.                       | 735 mm             |
| Da max.                       | 850 mm             |
| r1 min.                       | 6,4 mm             |
| da min.                       | 710 mm             |
| rb max.                       | 6,4 mm             |
| ra max.                       | 6,4 mm             |
| Size (mm)                     | 685.8x876.3x93.663 |
| Width (mm)                    | 93,663             |
| Bearing number                | EE655270/655345    |
| Bore Diameter (mm)            | 685,8              |
| Outer Diameter (mm)           | 876,3              |
| Calculation factor (e)        | 0,42               |
| Calculation factor (Y0)       | 0,79               |
| Basic dynamic load rating (C) | 2050 kN            |
| Basic static load rating (C0) | 5390 kN            |