


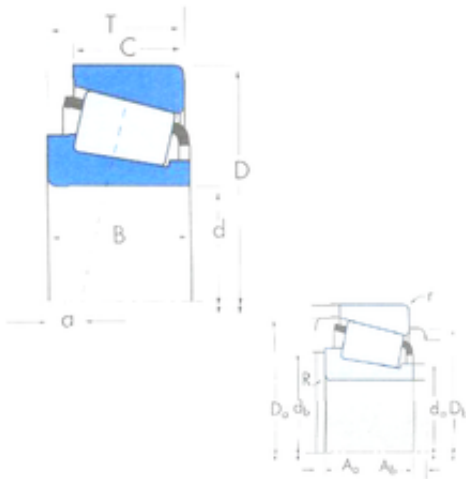

Bearing No. EE620100/620220

|                                  |                   |
|----------------------------------|-------------------|
| C                                | 69,85 mm          |
| r                                | 7,9 mm            |
| d                                | 254 mm            |
| D                                | 558,8 mm          |
| T                                | 123,825 mm        |
| B                                | 104,775 mm        |
| a                                | 48,8 mm           |
| R                                | 7,9 mm            |
| Db                               | 477 mm            |
| da                               | 308 mm            |
| db                               | 317 mm            |
| Da                               | 502 mm            |
| Size (mm)                        | 254x558.8x123.825 |
| Width (mm)                       | 123,825           |
| Factor (K)                       | 0,67              |
| Factor (G1)                      | 1730,9            |
| Factor (Cg)                      | 0,0667            |
| Factor (G2)                      | 165,3             |
| Bearing number                   | EE620100/620220   |
| Bore Diameter (mm)               | 254               |
| Outer Diameter (mm)              | 558,8             |
| Calculation factor (e)           | 0,87              |
| Basic static load rating (C0)    | 2680 kN           |
| Basic dynamic load rating (C1)   | 1760 kN           |
| Basic dynamic load rating (C90)  | 457               |
| Basic dynamic load rating (Ca90) | 678               |