




Bearing No. EE526130/526190

|                                 |                    |
|---------------------------------|--------------------|
| R                               | 6,3 mm             |
| a                               | 4,8 mm             |
| d                               | 330,2 mm           |
| D                               | 482,6 mm           |
| T                               | 85,725 mm          |
| B                               | 80,167 mm          |
| C                               | 60,325 mm          |
| r                               | 3,3 mm             |
| Ab                              | 3,1 mm             |
| Aa                              | 14,5 mm            |
| Db                              | 449 mm             |
| da                              | 351 mm             |
| db                              | 360 mm             |
| Da                              | 454 mm             |
| Weight                          | 45,23 Kg           |
| Size (mm)                       | 330.2x482.6x85.725 |
| Width (mm)                      | 85,725             |
| Factor (K)                      | 1,49               |
| Factor (G1)                     | 2283,3             |
| Factor (Cg)                     | 0,0553             |
| Factor (G2)                     | 287,2              |
| Bearing number                  | EE526130/526190    |
| Bore Diameter (mm)              | 330,2              |
| Outer Diameter (mm)             | 482,6              |
| Calculation factor (e)          | 0,39               |
| Basic static load rating (C0)   | 2320 kN            |
| Basic dynamic load rating (C1)  | 1230 kN            |
| Basic dynamic load rating (C90) | 318                |

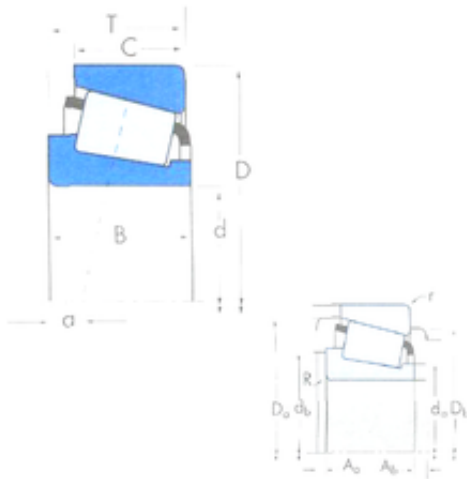

|                                  |     |
|----------------------------------|-----|
| Basic dynamic load rating (Ca90) | 213 |
|----------------------------------|-----|