


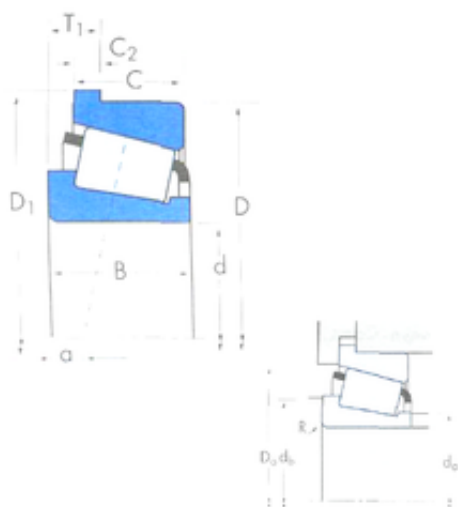

Bearing No. EE526130/526190B

|                                  |                    |
|----------------------------------|--------------------|
| C                                | 60,325 mm          |
| R                                | 6,3 mm             |
| d                                | 330,2 mm           |
| D                                | 482,6 mm           |
| B                                | 80,167 mm          |
| a                                | 4,8 mm             |
| da                               | 351 mm             |
| C2                               | 15,875 mm          |
| db                               | 360 mm             |
| D1                               | 498,373 mm         |
| Da                               | 449 mm             |
| T1                               | 41,275 mm          |
| Weight                           | 46,72 Kg           |
| Size (mm)                        | 330.2x482.6x80.167 |
| Width (mm)                       | 80,167             |
| Factor (K)                       | 1,49               |
| Factor (G1)                      | 2283,3             |
| Factor (G2)                      | 287,2              |
| Bearing number                   | EE526130/526190B   |
| Bore Diameter (mm)               | 330,2              |
| Outer Diameter (mm)              | 482,6              |
| Calculation factor (e)           | 0,39               |
| Basic static load rating (C0)    | 2320 kN            |
| Basic dynamic load rating (C1)   | 1230 kN            |
| Basic dynamic load rating (C90)  | 318                |
| Basic dynamic load rating (Ca90) | 213                |