


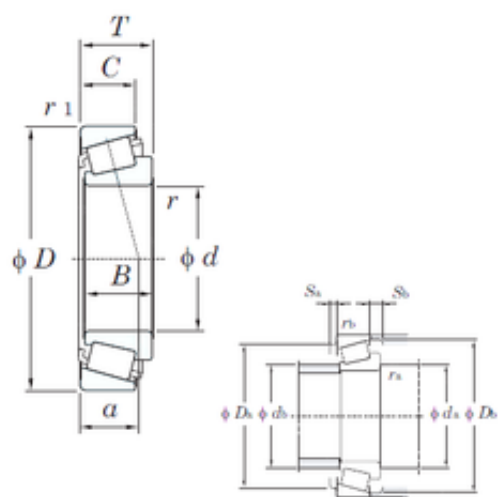

Bearing No. 32208JR

D	80 mm
d	40 mm
T	24,75 mm
B	23 mm
C	19 mm
a	19,4 mm
e	0.37
Cr	97.0
Y0	0.88
Y1	1.60
Cu	13.6
C0r	90.8
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
a(mm)	19.4
Da min	68 mm
da max	48 mm
Weight	0,554 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	75
db(max)	48
Da(max)	71.5
Da(min)	68
r1(min)	1.5
Sa(min)	3
Sb(min)	5.5
ra(max)	1.5

rb(max)	1.5
da(min)	48.5
ra max.	1,5 mm
Db min.	75 mm
Da max.	71,5 mm
da min.	48,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	6600
Category	Tapered Roller Bearings Assembly
Size (mm)	40x80x24.75
Component	Assembly
Inventory	0.0
Width (mm)	24,75
Grease lub.	5000
Bearing No.	32208JR
Basic Number	32208
Weight / LBS	1.221
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.974 Inch 24.75 Millimeter
Bearing number	32208JR
Precision Class	Standard
(Refer.)Mass(kg)	0.554
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 40MM Bore; 80MM Outside Diameter; 24.75MM Assembly Width; Single

	Row of Rollers
Outside Diameter	3.15 Inch 80 Millimeter
Weight / Kilogram	0.55
Manufacturer Name	KOYO
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,37
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	6600 r/min
Calculation factor (Y0)	0,88
Manufacturer Item Number	32208JR
(Grease) Lubrication Speed	5000 r/min
Basic static load rating (C0)	90,8 kN
Basic dynamic load rating (C)	77,7 kN