


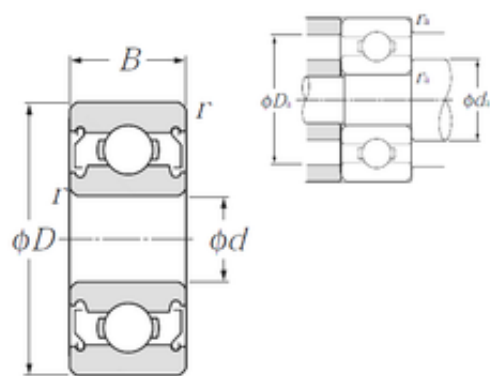

Bearing No. 607ZZ

B	6 mm
C	6 mm
d	7 mm
D	19 mm
Bore	0.276 Inch 7 Millimeter
Noun	Bearing
r min.	0,3 mm
UNSPSC	31171504
da max	10,4 mm
da min.	9 mm
Da max.	17 mm
ra max.	0,3 mm
series:	Micro
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	7x19x6
Inventory	0.0
Snap Ring	No
Width (mm)	6
bore type:	Round
maximum rpm:	40000 RPM
Weight / LBS	0.017
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
Other Features	Deep Groove Shell Alvania Prelubricated
bore diameter:	7 mm
overall width:	6 mm

Keyword String	Ball
fillet radius:	0.3 mm
cage material:	Steel
Bearing number	607ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	7MM Bore; 19MM Outside Diameter; 6MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.snrbearings.com
Outer Race Width	0.236 Inch 6 Millimeter
Outside Diameter	0.748 Inch 19 Millimeter
Inner Race Width	0 Inch 0 Millimeter
outside diameter:	19 mm
outer ring width:	6 mm
inner ring width:	6 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Weight / Kilogram	0.008
Bore Diameter (mm)	7
Internal Clearance	C0-Medium
internal clearance:	CN
Outer Diameter (mm)	19
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A

maximum rpm (grease):	34000 rpm
static load capacity:	910 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	2240 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	607.ZZ
Internal Special Features	No
(Grease) Lubrication Speed	34 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	2,24 kN
Basic static load rating (C0)	0,91 kN
Maximum Capacity / Filling Slot	No