


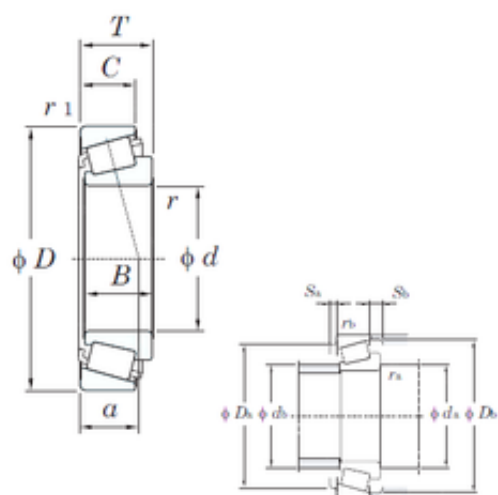

Bearing No. 32210JR

D	90 mm
d	50 mm
T	24,75 mm
B	23 mm
C	19 mm
a	20,6 mm
e	0.42
Cr	106
Cu	15.9
Y0	0.79
Y1	1.43
C0r	105
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
a(mm)	20.6
Da min	78 mm
da max	58 mm
Weight	0,643 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	85
db(max)	58
Da(max)	81.5
Da(min)	78
r1(min)	1.5
Sa(min)	3
Sb(min)	5.5
ra(max)	1.5

rb(max)	1.5
da(min)	58.5
ra max.	1,5 mm
Db min.	85 mm
Da max.	81,5 mm
da min.	58,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	5700
Category	Tapered Roller Bearings Assembly
Size (mm)	50x90x24.75
Component	Assembly
Inventory	0.0
Width (mm)	24,75
Grease lub.	4300
Bearing No.	32210JR
Basic Number	32210
Weight / LBS	1.418
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.974 Inch 24.75 Millimeter
Bearing number	32210JR
Precision Class	Standard
(Refer.)Mass(kg)	0.643
Outside Diameter	3.543 Inch 90 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 50MM Bore; 90MM Outside

	Diameter; 24.75MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.64
Manufacturer Name	KOYO
Bore Diameter (mm)	50
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Calculation factor (e)	0,42
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	5700 r/min
Calculation factor (Y0)	0,79
Manufacturer Item Number	32210JR
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	105 kN
Basic dynamic load rating (C)	85 kN