


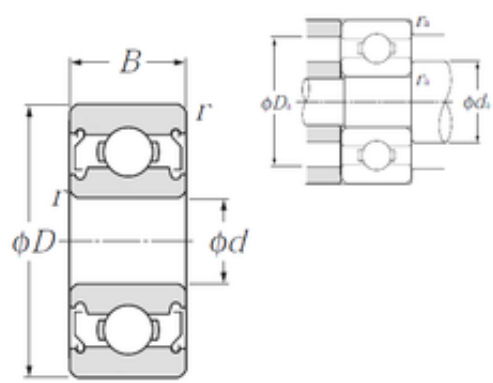

Bearing No. R6ZZ

C	7,142 mm
d	9,525 mm
D	22,225 mm
B	7,142 mm
Bore	0.375 Inch 9.525 Millimeter
Noun	Bearing
Weight	15 Kg
da max	11,9 mm
UNSPSC	31171504
r min.	0,41 mm
da min.	11,5 mm
ra max.	0,4 mm
series:	Micro
Da max.	20,2 mm
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	9.525x22.225x7.142
Inventory	33.0
Snap Ring	No
Width (mm)	7,142
bore type:	Round
maximum rpm:	37000 RPM
Weight / LBS	0.024
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Inch
Other Features	Deep Groove Miniature Bearing Shell Alvania Prelubricated

bore diameter:	0.3750 in
overall width:	0.2812 in
Keyword String	Ball
cage material:	Steel
fillet radius:	0.0160 in
Bearing number	R6ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	3/8" Bore; 7/8" Outside Diameter; 9/32" Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	0.875 Inch 22.225 Millimeter
Outer Race Width	0.281 Inch 7.137 Millimeter
Inner Race Width	0 Inch 0 Millimeter
outside diameter:	0.8750 in
outer ring width:	0.2812 in
inner ring width:	0.2812 in
Manufacturer Name	NTN
bearing material:	High Carbon Chrome
precision rating:	Class 0
Weight / Kilogram	0.011
Bore Diameter (mm)	9,525
Internal Clearance	C0-Medium
internal clearance:	CN
Outer Diameter (mm)	22,225

snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
maximum rpm (grease):	31000 rpm
static load capacity:	315 lbf
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	740 lbf
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	R6ZZ
Internal Special Features	No
(Grease) Lubrication Speed	31000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 250 °F
Basic dynamic load rating (C)	3,3 kN
Basic static load rating (C0)	1,4 kN
Maximum Capacity / Filling Slot	No