


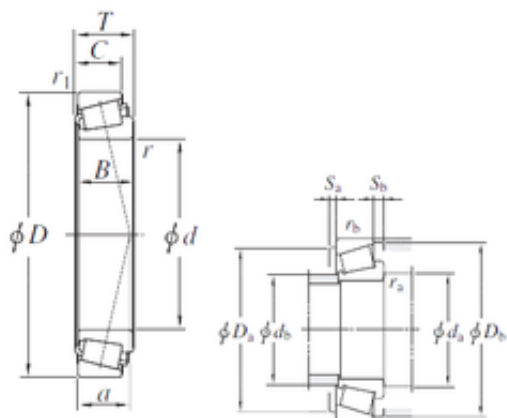

Bearing No. 32224JR

e	0.44
d	120 mm
D	215 mm
T	61,5 mm
B	58 mm
C	50 mm
a	51,6 mm
Y0	0.76
Y1	1.38
Db	204 mm
Cu	84.0
Cr	589
C0r	691
Noun	Bearing
Bore	4.724 Inch 120 Millimeter
a(mm)	51.6
da max	136 mm
Da min	181 mm
UNSPSC	31171516
r min.	3 mm
Weight	9,04 Kg
r(min)	3
Db(min)	204
r1(min)	2.5
da(min)	134
db(max)	136
Da(max)	203
Da(min)	181
ra(max)	2.5

Sa(min)	7
r1 min.	2,5 mm
da min.	134 mm
Da max.	203 mm
db max.	136 mm
Db min.	204 mm
ra max.	2,5 mm
r2 min.	2,5 mm
rb(max)	2
rb max.	2 mm
Sb(min)	11.5
Category	Tapered Roller Bearings Assembly
Oil lub.	2300
Component	Assembly
Inventory	0.0
Size (mm)	120x215x61.5
Width (mm)	61,5
Grease lub.	1700
Bearing No.	32224JR
Basic Number	32224
Weight / LBS	19.93
Product Group	B04334
Inch - Metric	Metric
Bearing number	32224JR
Assembly Width	2.421 Inch 61.5 Millimeter
Keyword String	Tapered
Other Features	High Load Capacity
Precision Class	Standard
(Refer.)Mass(kg)	9.04
Manufacturer URL	http://www.koyousa.com
Outside Diameter	8.465 Inch 215

	Millimeter
Long Description	Assembly; Standard Precision; 120MM Bore; 215MM Outside Diameter; 61.5MM Assembly Width; Single Row of Rollers
Manufacturer Name	KOYO
Weight / Kilogram	10.26
Bore Diameter (mm)	120
Outer Diameter (mm)	215
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,44
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	2300 r/min
Flange Outside Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	32224JR
(Grease) Lubrication Speed	1700 r/min
Basic static load rating (C0)	691 kN
Basic dynamic load rating (C)	470 kN