


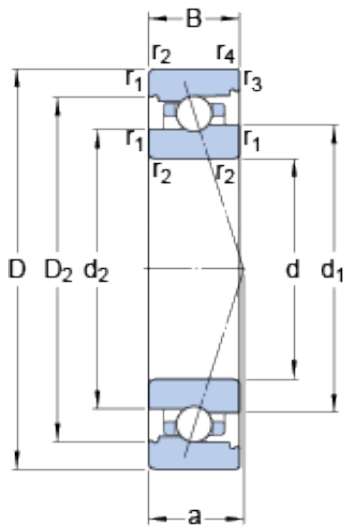

Bearing No. 7022 ACB/HCP4A

D	170 mm
d	110 mm
B	28 mm
a	46.9 mm
Ball - z	31
Size (mm)	170x110x28
Width (mm)	28
Mass bearing	2.08 kg
d_n	134.6 mm
d_n	134.6 mm
D_2	151.9 mm
d_1	133.2 mm
d_2	130.5 mm
D_2	151.9 mm
d_2	130.5 mm
d_1	133.2 mm
Bearing number	7022 ACB/HCP4A
Preload class A	205 N/micron
G_{ref}	22.25 cm ³
Preload class C	397 N/micron
Preload class B	266 N/micron
Number of balls z	31
Bore Diameter (mm)	170
r_b max.	1 mm
r_a max.	2 mm
D_b max.	165.4 mm
D_a max.	161 mm
d_a min.	119 mm
d_b min.	119 mm

Outer Diameter (mm)	110
D_b - max.	165.4 mm
d_a - min.	119 mm
Calculation factor e	0.68
Calculation factor f	1.07
r_b - max.	1 mm
D_a - max.	161 mm
r_a - max.	2 mm
$r_{3,4}$ min.	1 mm
$r_{1,2}$ min.	2 mm
Ball - D_w	11.112 mm
d_b - min.	119 mm
$r_{1,2}$ - min.	2 mm
$r_{3,4}$ - min.	1 mm
Calculation factor - e	0.68
Calculation factor - f	1.07
Basic dynamic load rating C	46.8 kN
Ball diameter D_w	11.112 mm
Preload class B G_B	420 N
Preload class C G_C	1260 N
Basic dynamic load rating - C	35.1 kN
Preload class A G_A	210 N
Preload class B - G_B	420 N
Preload class C - G_C	1260 N
Preload class A - G_A	210 N
Fatigue load limit P_u	1.22 kN
Calculation factor f_1	0.99
Calculation factor f_{2C}	1.05
Calculation factor f_{2A}	1
Calculation factor f_{HC}	1.01

Calculation factor f_{2B}	1.02
Limiting speed for oil lubrication	16000 mm/min
Fatigue load limit - P_u	1.2 kN
Calculation factor - f_1	0.99
Calculation factor - Y_2	1.41
Calculation factor - X_2	0.67
Calculation factor - Y_1	0.92
Calculation factor - Y_0	0.76
Calculation factor - f_{HC}	1.01
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2B}	1.02
Limiting speed for grease lubrication	11000 r/min
Basic static load rating C_0	56 kN
Static axial stiffness, preload class B	266 N/ μ m
Static axial stiffness, preload class A	205 N/ μ m
Attainable speed for grease lubrication	11000 r/min
Static axial stiffness, preload class C	397 N/ μ m
Basic static load rating - C_0	34 kN
Attainable speed for oil-air lubrication	16000 r/min
Reference grease quantity G_{ref}	22.25 cm ³
Calculation factor (single, tandem) Y_2	0.87
Calculation factor	0.38

(single, tandem) Y_0	
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back- to-back, face-to-face) Y_1	0.92
Calculation factor (back- to-back, face-to-face) Y_2	1.41
Calculation factor (back- to-back, face-to-face) Y_0	0.76
Calculation factor (back- to-back, face-to-face) X_2	0.67