


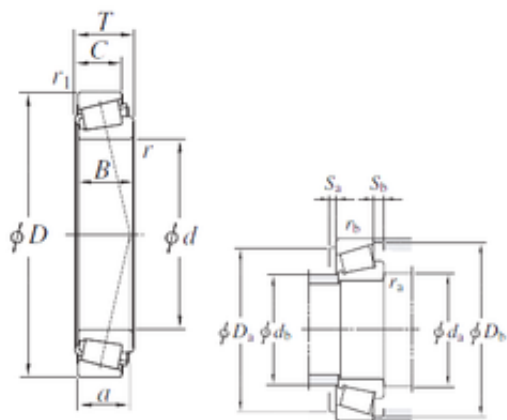

Bearing No. 32226JR

C	54 mm
d	130 mm
D	230 mm
T	67,75 mm
B	64 mm
a	56 mm
e	0.44
Cr	693
Y0	0.76
Y1	1.38
Cu	99.9
Db	219 mm
C0r	830
Bore	5.118 Inch 130 Millimeter
Noun	Bearing
a(mm)	56.0
r(min)	4
UNSPSC	31171516
Weight	11,5 Kg
r min.	4 mm
Da min	193 mm
da max	146 mm
Db min.	219 mm
ra max.	3 mm
r1 min.	3 mm
r1(min)	3
r2 min.	3 mm
da(min)	148
da min.	148 mm

db(max)	146
Da(max)	216
Da(min)	193
Db(min)	219
Sa(min)	7
Sb(min)	13.5
rb(max)	2.5
Da max.	216 mm
db max.	146 mm
rb max.	2,5 mm
ra(max)	3
Category	Tapered Roller Bearings Assembly
Oil lub.	2200
Inventory	0.0
Component	Assembly
Size (mm)	130x230x67.75
Width (mm)	67,75
Bearing No.	32226JR
Grease lub.	1600
Weight / LBS	25.353
Basic Number	32226
Inch - Metric	Metric
Product Group	B04334
Bearing number	32226JR
Assembly Width	2.667 Inch 67.75 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Outside Diameter	9.055 Inch 230 Millimeter
Long Description	Assembly; Standard

	Precision; 130MM Bore; 230MM Outside Diameter; 67.75MM Assembly Width; Single Row of Rollers
(Refer.)Mass(kg)	11.5
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	12.42
Bore Diameter (mm)	130
Outer Diameter (mm)	230
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,44
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	2200 r/min
Manufacturer Item Number	32226JR
(Grease) Lubrication Speed	1600 r/min
Basic static load rating (C0)	830 kN
Basic dynamic load rating (C)	554 kN