


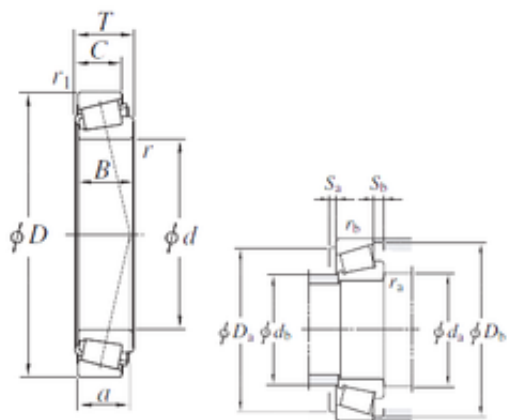

Bearing No. 32228JR

C	58 mm
d	140 mm
D	250 mm
T	71,75 mm
B	68 mm
a	60 mm
e	0.44
Cr	796
Y0	0.76
Y1	1.38
Cu	112
Db	238 mm
C0r	961
Bore	5.512 Inch 140 Millimeter
Noun	Bearing
a(mm)	60.0
r(min)	4
UNSPSC	31171516
Weight	14,7 Kg
r min.	4 mm
Da min	210 mm
da max	158 mm
Db min.	238 mm
ra max.	3 mm
r1 min.	3 mm
r1(min)	3
r2 min.	3 mm
da(min)	158
da min.	158 mm

db(max)	158
Da(max)	236
Da(min)	210
Db(min)	238
Sa(min)	9
Sb(min)	13.5
rb(max)	2.5
Da max.	236 mm
db max.	158 mm
rb max.	2,5 mm
ra(max)	3
Category	Tapered Roller Bearings Assembly
Oil lub.	2000
Inventory	0.0
Component	Assembly
Size (mm)	140x250x71.75
Width (mm)	71,75
Bearing No.	32228JR
Grease lub.	1500
Weight / LBS	32.408
Basic Number	32228
Inch - Metric	Metric
Product Group	B04334
Bearing number	32228JR
Assembly Width	2.825 Inch 71.75 Millimeter
Other Features	High Load Capacity
Keyword String	Tapered
Precision Class	Standard
Outside Diameter	9.843 Inch 250 Millimeter
Long Description	Assembly; Standard

	Precision; 140MM Bore; 250MM Outside Diameter; 71.75MM Assembly Width; Single Row of Rollers
(Refer.)Mass(kg)	14.7
Manufacturer URL	http://www.koyousa.com
Manufacturer Name	KOYO
Weight / Kilogram	14.71
Bore Diameter (mm)	140
Outer Diameter (mm)	250
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.20.00.00
Number of Tapered Rows	Single Row
Calculation factor (e)	0,44
Flange Outside Diameter	0 Inch 0 Millimeter
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	2000 r/min
Manufacturer Item Number	32228JR
(Grease) Lubrication Speed	1500 r/min
Basic static load rating (C0)	961 kN
Basic dynamic load rating (C)	636 kN